

449122025400

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. § 371**

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

10/088682  
Not yet assigned

INTERNATIONAL APPLICATION NO

PCT/DE00/03207

INTERNATIONAL FILING DATE

September 14, 2000

PRIORITY DATE CLAIMED

September 21, 1999

TITLE OF INVENTION

**COMMUNICATIONS SYSTEM AND METHOD**

APPLICANT(S) FOR DO/EO/US

**Antonius EMMERINK et al.**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:


1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☒ is attached hereto (required only if not communicated by the International Bureau)
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application under PCT Article 19 (35 U.S.C. 371(c)(2)).
  - a. ☒ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).


Items 11. to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment
14. ☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☒ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items: 1) Application Data Sheet; 2) Int'l Search Report; 3) IPER; 4) Return receipt postcard.

**CERTIFICATE OF HAND DELIVERY**

I hereby certify that this correspondence is being hand filed with the United States Patent and Trademark Office in Washington, D.C. on March 21, 2002.

  
Melissa Garton

|  |              |  |            |  |     |
|--|--------------|--|------------|--|-----|
| U.S. APPLICATION NO (if known, see 37 CFR 1.5)<br><b>Not yet assigned 10/088682</b>  |              | INTERNATIONAL APPLICATION NO.<br><b>PCT/DE00/03207</b> |            | ATTORNEY DOCKET NO<br><b>449122025400</b>  |     |
| 21. <input checked="" type="checkbox"/> The following fees are submitted:<br><b>BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):</b><br>Neither international preliminary examination fee (37 CFR 1.482)<br>nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO<br>and International Search Report not prepared by the EPO or JPO.....\$1,040.00<br>International preliminary examination fee (37 CFR 1.482) not paid to<br>USPTO but International Search Report prepared by the EPO or JPO.....\$890.00<br>International preliminary examination fee (37 CFR 1.482) not paid to USPTO<br>but international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$740.00<br>International preliminary examination fee (37 CFR 1.482) paid to USPTO<br>but all claims did not satisfy provision of PCT Article 33(1)-(4) .....\$710.00<br>International preliminary examination fee (37 CFR 1.482) paid to USPTO<br>and all claims satisfied provisions of PCT Article 33(1)-(4) .....\$100.00 |              |  |            | <b>CALCULATIONS<br/>PTO USE ONLY</b>       |     |
|  |              |  |            |  |     |
| <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>  |              |  |            | \$890.00                                   |     |
| Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from<br>the earliest claimed priority date (37 CFR 1.492(e)).  |              |  |            | \$0  |     |
| CLAIMS   | NUMBER FILED | NUMBER EXTRA   | RATE       |  |     |
| Total claims   | - 20 =       |  | x \$18.00  | \$0  |     |
| Independent claims   | - 3 =        |  | x \$84.00  | \$0  |     |
| MULTIPLE DEPENDENT CLAIM(S) (if applicable)  |              |  | + \$280.00 | \$0  |     |
| <b>TOTAL OF ABOVE CALCULATIONS =</b>   |              |  |            | \$890.00                                   |     |
| <input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced<br>by 1/2.  |              |  |            | \$0  |     |
| <b>SUBTOTAL =</b>  |              |  |            | \$890.00                                   |     |
| Processing fee of <b>\$130.00</b> for furnishing the English translation later than<br><input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).   |              |  |            | +  | \$0 |
| <b>TOTAL NATIONAL FEE =</b>  |              |  |            | \$890.00                                   |     |
| Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be<br>accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00 per property</b>   |              |  |            | +  | \$0 |
| <b>TOTAL FEES ENCLOSED =</b>   |              |  |            | \$890.00                                   |     |
|  |              |  |            | <b>Amount<br/>to be<br/>refunded:</b>      | \$  |
|  |              |  |            | <b>charged:</b>                            | \$  |
| a. <input checked="" type="checkbox"/> Please charge my <b>Deposit Account No. 03-1952</b> (referencing Docket No. 449122025400) in the amount of \$890.00 to<br>cover the above fees. A duplicate copy of this sheet is enclosed.   |              |  |            |  |     |
| b. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees that may be required, or credit any overpayment to<br><b>Deposit Account No. 03-1952</b> (referencing Docket No. 449122025400).   |              |  |            |  |     |
| <b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive<br/>                 (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b>  |              |  |            |  |     |
| SEND ALL CORRESPONDENCE TO:<br>Kevin R. Spivak<br>Morrison & Foerster LLP<br>2000 Pennsylvania Avenue, N.W.<br>Washington, D.C. 20006-1888   |              |  |            |  |     |
| <br>SIGNATURE  |              |  |            | Kevin R. Spivak<br>Registration No. 43,148 |     |
| March 21, 2002   |              |  |            |  |     |

**CERTIFICATE OF HAND DELIVERY**

I hereby certify that this correspondence is being hand filed with the United States Patent and Trademark Office in Washington, D.C. on March 21, 2002.

  
Melissa Garton

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In the application of:

Antonius EMMERINK et al.

Serial No.: Not yet assigned

Filing Date: March 21, 2002

For: COMMUNICATIONS SYSTEM  
AND METHOD

Examiner: Not yet assigned

Group Art Unit: Not yet assigned

**PRELIMINARY AMENDMENT**

**BOX PCT**

Commissioner for Patents  
Washington, D.C. 20231

Sir:

Prior to examination on the merits, please amend this application as follows:

**In the Claims:**

What is claimed is:

1. (Amended) A method for setting up and/or clearing down and sustaining a communications link, comprising:
  - providing a communications link between at least two local devices in a transport network by local switching centers associated with the local devices;
  - controlling the setup and/or clear-down of the communications link by a central control device via a control network;
  - controlling the connection setup and/or clear-down in the transport network using at least two control information items;
  - using a connection information item defining a timeslot connection via a switching matrix representing a first control information item; and

providing a protocol information item representing a second control information item for the central control device and/or for the local devices to select communications protocols to be used and useable transport media.

3. (Amended) The method as claimed in claim 1, wherein the communications link comprises at least two connection elements in the transport network, where each connection element uses at least one respective communications protocol whose layer structure differs in at least one layer and in which the control information item is complemented by an information item which identifies a conversion apparatus for the various communications protocols.
4. (Amended) The method as claimed in claim 1, wherein the communications link comprises at least two connection elements in the transport network, where each connection element uses at least one respective communications protocol whose layer structure differs in at least one layer and in which the control information item is complemented by an information item which identifies a media access device for a respective communication medium.
5. (Amended) The method as claimed in claim 1, in which an information item is provided centrally to complement the control information item in the area of the central control device.
6. (Amended) The method as claimed in claims 4, in which an information item is provided locally to complement the control information item and is ascertained at least once by the central control device in the course of the handling of a communications link.
7. (Amended) The method as claimed in claim 3, in which connection elements between local devices in the transport network use the Internet Protocol for transmission, and in which connection control is effected by assigning to an IP address one PCM data-stream subscriber line and a local device.

8. (Amended) The method as claimed in claim 1, in which control information checks whether a connection setup via the transport network is necessary, and provides the connection elsewhere.

9. (Amended) The method as claimed in claim 8, in which the control information item used is at least one address for a local device, and if the communications link relates to communications terminals which are connected to the same local device, a connection is set up without the communications data being converted on a transport-network-specific basis.

10. (Amended) An arrangement for setting up and/or clearing down, and sustaining, a communications link, comprising:

- a transport network to provide a communications link;
- a control network to control the setup and/or clear-down of the communications link;
- a first device to control the connection setup and/or clear-down in the transport network via the control network, the device configured with a physical separation from the transport network, which output at least two control information items,
- and in which the transport network has at least two local devices to output and receive communications data; and
- a switching center to provide a communications link in the transport network, where at least one connection element of the communications link is in the form of a connection which uses the Internet Protocol as communications protocol.

11. (Amended) The arrangement as claimed in claim 10, in which the control network has a central device and is operatively connected to a second device to provide transport-network-specific protocol information and/or transport network media information.

12. (Amended) The arrangement as claimed in claim 11, in which the second device is arranged centrally in the area of the first device.

13. (Amended) The arrangement as claimed in claim 11, in which the second device is arranged locally in the area of the local device.

14. (Amended) The arrangement as claimed in claim 10, in which a local device has at least one conversion device in the form of a gateway to convert a TDM protocol into an IP protocol.

15. (Amended) The arrangement as claimed in claim 10, in which the local device has at least one network access device to an Ethernet, in the form of a transceiver.

16. (Amended) The arrangement as claimed in claim 10, in which a local device has at least a first device to address evaluation of addresses for local devices which output a first signal when a communications link relates to a single central device.

17. (Amended) The arrangement as claimed in claim 16, in which the first signal is output to a device to access timeslots in the TDM data stream from the local device, and the local device shorts the connection in the TDM data stream in response to the reception of the signal.

18. (Amended) The arrangement as claimed in claim 17, in which the connection is shorted by interchanging the reading and writing directions.

19. (Amended) The arrangement as claimed in claim 10, in which the local device is in the form of an integrated communications terminal.

20. (Amended) The arrangement as claimed in claim 19, in which the integrated communications terminal is in the form of a telephone.

21. (Amended) The arrangement as claimed in claim 19, in which the communications terminal is in the form of a personal computer.

**In the Abstract:**

Please replace the Abstract with the substitute Abstract attached hereto.

REMARKS


Amendments to the specification have been made and are submitted herewith in the attached Substitute Specification. A clean copy of the specification and a marked-up version showing the changes made are attached herewith. The claims and abstract have been amended in the attached Preliminary Amendment. All amendments have been made to place the application in proper U.S. format and to conform with proper grammatical and idiomatic English. None of the amendments herein are made for reasons related to patentability. No new matter has been added.

Attached hereto is a marked-up version of the changes made to the claims by the current amendment. The attached page is captioned "Version with markings to show changes made".

In the unlikely event that the transmittal letter is separated from this document and the Patent Office determines that an extension and/or other relief is required, applicant petitions for any required relief including extensions of time and authorizes the Commissioner to charge the cost of such petitions and/or other fees due in connection with the filing of this document to Deposit Account No. 03-1952 referencing docket no. 449122025400. However, the Commissioner is not authorized to charge the cost of the issue fee to the Deposit Account.

Respectfully submitted,

Dated: March 21, 2002

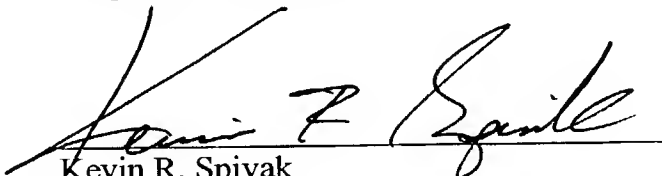  
Kevin R. Spivak  
Registration No. 43,148

Morrison & Foerster LLP  
2000 Pennsylvania Avenue, N.W.  
Washington, D.C. 20006-1888  
Telephone: (202) 887-6924  
Facsimile: (202) 263-8396

VERSION WITH MARKINGS TO SHOW CHANGES MADE

For the convenience of the Examiner, the changes made are shown below with deleted text in strikethrough and added text in underline.

In the Claims:

Patent Claims

What is claimed is:

1. (Amended) A method for setting up and/or clearing down and sustaining a communications link, ~~in which~~ comprising:  
providing a communications link between at least two local devices (~~DZ10-DZ40~~) ~~is provided~~ in a transport network (~~71030, 72030, 72040, 73020~~) by local switching centers (~~CS10-CS40~~) associated with the local devices(~~DZ10-DZ40~~);  
controlling the setup and/or clear-down of the communications link ~~is controlled~~ by a central control device via a control network(~~310, 410, STN~~);  
controlling the connection setup and/or clear-down in the transport network ~~is controlled~~ using at least two control information items;  
using a connection information item ~~suitable for~~ defining a timeslot connection via a switching matrix ~~represents~~ representing a first control information item; and,  
providing a protocol information item ~~represents~~ representing a second control information item ~~and is provided~~ for the central control device and/or for the local devices (~~DZ10-DZ40~~) ~~for the purposes of selecting~~ to select communications protocols to be used and useable transport media.
  
3. (Amended) The method as claimed in claim 1, wherein the ~~one of the preceding~~ ~~claims,~~  
~~for a~~ communications link ~~comprising~~ comprises at least two connection elements (~~73020, 72030~~) in the transport network, where each connection element  
uses at least one respective communications protocol whose layer structure differs in at least one layer and in which the control information item is complemented by an information item which identifies a conversion apparatus (~~U20, U2030, U30, 3020~~) for the various communications protocols.



4. (Amended) **The method as claimed in one of the preceding claims claim 1, wherein** ~~the~~ communications link ~~comprising~~ **comprises** at least two connection elements in the transport network, where each connection element uses at least one respective communications protocol whose layer structure differs in at least one layer and in which the control information item is complemented by an information item which identifies a media access device (~~CS10, Cs30~~) for a respective communication medium.

5. (Amended) The method as claimed in ~~one of the preceding claims~~ **claim 1**, in which an information item is provided centrally ~~for the purposes of complementing~~ **to complement** the control information item in the area of the central control device(~~ZE1, ZE2, ZE100~~).

6. (Amended) The method as claimed in ~~one of~~ claims 4 to 6, in which an information item is provided locally ~~for the purposes of complementing~~ **to complement** the control information item and is ascertained at least once by the central control device (~~ZE1, ZE2, ZE100~~) in the course of the handling of a communications link(~~71030, 72030, 73020, 72040~~).

7. (Amended) **The method as claimed in one of claims 3 to 5 claim 3**, in which connection elements between local devices (~~DZ10, ..., DZ40~~) in the transport network use the Internet Protocol for transmission, and in which connection control is effected by assigning to an IP address ~~precisely~~ one PCM data-stream subscriber line (~~KE~~) and a local device(~~DZ~~).

8. (Amended) The method as claimed in ~~one of the preceding claims~~ **claim 1**, in which control information ~~is used to check~~ whether a connection setup via the transport network (~~72040~~) is necessary, and if not, **provides** the connection ~~is provided~~ elsewhere.

9. (Amended) The method as claimed in claim 8, in which the control information item used is at least one address for a local device(~~DZ~~), and if the communications link relates to communications terminals (~~KE~~) which are connected to the same local device(~~DZ~~), a connection is set up without the communications data being converted on a transport-network-specific basis.

10. (Amended) An arrangement for setting up and/or clearing down, and sustaining, a communications link, **comprising:**

a) ~~which has~~ a transport network (71030, 72030, 72040, 73020) ~~for providing~~ **to provide** a communications link;

b) ~~which has~~

a control network (310, 410, STN) ~~for controlling~~ **to control** the setup and/or clear-down of the communications link ~~and which has;~~

~~a first means for controlling~~ **device to control** the connection setup and/or clear-down in the transport network via the control network, ~~these means being arranged~~ **the device configured** with a physical separation from the transport network, which output at least two control information items,

and in which the transport network has at least two local devices (DZ10, DZ20..., DZ40) ~~for outputting and receiving communications data, and in the area of the local device has a switching center (CS) for providing~~ **to output and receive communications data; and**

**a switching center to provide** a communications link in the transport network, where at least one connection element (71030, 72030) of the communications link is in the form of a connection which uses the Internet Protocol as communications protocol.

11. (Amended) The arrangement as claimed in claim 10, in which the control network (310, 410, STN) has a central device (ZE) ~~for control purposes and is operatively connected to second means at least for the purposes of providing~~ **a second device to provide** transport-network-specific protocol information and/or transport network media information.

12. (Amended) The arrangement as claimed in claim 11, in which the second ~~means are~~ **device is** arranged centrally in the area of the first ~~means~~ **device**.

13. (Amended) The arrangement as claimed in claim 11, in which the second ~~means are~~ **device is** arranged locally in the area of the local device ~~(DZ)~~.

14. (Amended) The arrangement as claimed in ~~one of claims 10 to 13~~ **claim 10**,

in which a local device (DZ) has at least one conversion device (U1030, U30) in the form of a gateway ~~for converting~~ **to convert** a TDM protocol into an IP protocol.

15. (Amended) The arrangement as claimed in ~~one of claims 10 to 14~~ **claim 10**, in which the local device has at least one network access device to an Ethernet, in the form of a transceiver.

16. (Amended) **The arrangement as claimed in one of claims 10 to 14 claim 10**, in which a local device (DZ) has at least a first means for device to address evaluation of addresses for local devices (DZ) which output a first signal when a communications link (2050, 2060, 2070) relates ~~only~~ to a single central device(DZ).

17. (Amended) The arrangement as claimed in claim 16, in which the first signal is output to a device ~~for accessing~~ **to access** timeslots in the TDM data stream (302) from the local device, and the ~~latter~~ **local device** shorts the connection in the TDM data stream (302) in response to the reception of the signal.

18. (Amended) The arrangement as claimed in claim 17, in which the connection is shorted by interchanging the reading and writing directions.

19. (Amended) The arrangement as claimed in ~~one of claims 10 to 15~~ **claim 10**, in which the local device is in the form of an integrated communications terminal(~~KE10...~~, KE40).

20. (Amended) The arrangement as claimed in claim 19, in which the integrated communications terminal is in the form of a telephone(~~KE30~~).

21. (Amended) The arrangement as claimed in claim 19, in which the communications terminal is in the form of a personal computer(~~KE10, KE20, KE40~~).

**In the Abstract:**

Please replace the Abstract with the substitute Abstract attached hereto.

## COMMUNICATIONS SYSTEM

### Abstract

The invention describes a method and an arrangement for actuating and operating a heterogeneous transport network which comprises connection elements, such as ATM and Ethernet connections, by controlling a TDM-based switching system. In the area of the transport network, there are gateways and routers which are actuated by the central control device for the purposes of setting up and clearing down a connection. Information relating to the accessibility of specific communications subscribers by means of communication medium and communications protocol is either stored in the area of a central control mechanism or is available locally in the area of local access devices for subscriber terminals. The invention also specifies integrated terminals for Internet telephony which are likewise able to be actuated by means of a TDM-based control mechanism. The invention specifies a simple method and a simple arrangement which allow very heterogeneous communications infrastructures to be provided which have the advantage that they behave like a single private branch exchange and work together with normal control mechanisms. One advantageous refinement produces local connections without burdening transport-network-specific devices.

# COMMUNICATIONS SYSTEM AND METHOD

## CLAIM FOR PRIORITY

5 This application claims priority to International Application No. PCT/DE00/03207 which was published in the German language on September 14, 2000.

## TECHNICAL FIELD OF THE INVENTION

10 The invention relates to a method and an arrangement for setting up and clearing down, and sustaining, communications links, and in particular, within the context of a private branch exchange and terminals which are to be connected.

15

## BACKGROUND OF THE INVENTION

The rising volume of communication, as a result of an increasing number of communications subscribers and rising demands on the volume of data to be transmitted, places greater and greater demands on switching centers, in particular on private branch exchanges, with regard to the volume of data to be transmitted for each communications link and the number of communications terminals which are to be connected to one another.

Current devices are based, by way of example, on the TDM method (Time Division Multiplexing), in which communications data on different connections are transmitted in respectively defined timeslots. A connection between different communication parties is set up by a switching matrix which assigns incoming timeslots on an incoming connection outgoing timeslots to an outgoing connection on the basis of a control information item. Such switching matrices are generally of fixed proportions and can set up only a defined number of connections, which often makes it difficult to match exchanges to requirements. Another problem with such devices is that the timeslots are able to

hold only a limited amount of data.

On account of different strengths and weaknesses of networks when transporting voice and data in the local domain, various communications networks have become established for specific purposes of use.

Figure 1 shows an example of a known private branch exchange 150 with two peripheral devices P1 and P2 to which a communications terminal KE1 and KE2 operating on a digital or analog basis is respectively connected. These peripheral devices P1 and P2 are accommodated in the same physical area as the central device ZE1. By way of example, they are in the same room or in the same cabinet as it. The terminals occupy defined timeslots in the PCM data stream (Pulse Code Modulation) with communication data. The digital or analog communications terminals KE1 and KE2 are respectively connected to subscriber line modules SLM01 and SLM02 which supply or take digital data, intended for the respective terminals or coming from the respective terminals, to/from the PCM data stream using timeslots stipulated by signaling. These PCM data streams are denoted by 100 and 200 in figure 1. In addition, signaling connections are shown which are represented by 110 and 210. It should be noted that these involve a logical representation and not a physical representation. In reality, however, the transport data and the signaling data are transmitted in the same connecting cable.

This figure also shows peripheral devices P1 and P2 and supply modules LTUC1 and LTUC2 which regulate the data traffic to the subscriber line modules of the respective peripheral devices. The peripheral device P1 is supplied with signaling data via the line 110, and the peripheral device P2 is supplied with signaling data via the signaling line 210.

As can clearly be seen here, this arrangement involves both the information to be transported and the signaling information being supplied to a central device ZE1. In this context, a messaging device DCL  
5 collects and distributes messages 2 which are interchanged between the central device ZE1 and the peripheral devices P1, P2. The call processing section CP controls the setup and clear-down of connections and, to this end, uses equipment-specific interface  
10 functions DH, inter alia, which are in the form of program modules, for example. This involves producing setting instructions 1 for the switching matrix MTS. These setting instructions essentially indicate which input of the switching matrix is to be connected to  
15 which output in order to provide a communications link. Control and connection functions are thus performed by a single physically incorporated functional unit in the communications network.

20 Problems arise with such configurations because the data to be transported need to be supplied to the central device ZE1. This is the case even if, by way of example, two communications terminals which are connected to the same peripheral device P1 need to  
25 communicate with one another. The wiring complexity required for such devices increases with increasing distance between the terminals and the central device ZE1, which means that this type of arrangement restricts the extent of a private branch exchange or  
30 makes installation much more expensive when covering relatively large areas.

In such devices, problems likewise arise with regard to modular extendibility both in terms of the number of  
35 connections and in terms of the volume of data to be transmitted. This type of embodiment does not allow different data rates for each individual communications link.



Alignment and/or transparent integration of different network infrastructures is likewise not possible.

#### SUMMARY OF THE INVENTION

5 The invention specifies a method and an arrangement for providing a communications link which ensure a high level of flexibility in terms of matching to network infrastructures and in terms of the physical extent thereof.

10

One advantage of the invention is the operation of a heterogeneous communications network using a joint control mechanism, because information about the type of protocol which can be used to reach respective  
15 subscribers is held in the area of the central control mechanism, or in the transport network. Advantageously, the topology of the transport network can differ from that of the control network in this context. This makes it possible to set up a communications link while  
20 avoiding numerous diverse conversion procedures which would be necessary on a previously stipulated path between the subscribers. This advantageously takes account of the fact that the subscribers communicate using different communications protocols, with local  
25 matching to the required communications protocol, as opposed to central matching, allowing the communications path to be routed via a minimal number of conversion devices, which protects the resources in the network and keeps down the length of the  
30 communications paths in the transport network.

In one embodiment of the invention, the method described provides not only the protocol information item but also a media information item relating to the  
35 transport network, because this makes it possible to take into account the characteristic of different transmission media in terms of transport quality, utilization and speed when controlling the connection setup.

4

2025 RELEASE UNDER E.O. 14176

In another embodiment of the invention, the method described allows the different protocol structure of communications protocols handled on a single medium or on different media to be taken into account by  
5 actuating suitable protocol conversion units, associated with communications subscribers which are involved, in an appropriately defined manner when setting up and sustaining the connection.

10 In still another embodiment of the invention, the method described allows a defined media access device to be actuated for a particular communications subscriber. If a plurality of transport media are available for each communications subscriber, this  
15 advantageously allows them to be specifically taken into account and actuated when a connection is set up.

In another embodiment of the invention, the method described allows the information required for  
20 controlling the transport network to be set up and/or provided centrally, because the problem of updating, maintaining and saving these data is then limited to the maintenance of a central database.

25 Advantageously, one aspect of the method described affords the opportunity for required control information to be provided locally in the transport network and for the control mechanism to request it when a connection is set up, because this allows local  
30 measures for aligning the transport network to be taken without such measures affecting the entire transport network and a central control mechanism.

Advantageously, in another aspect of the method  
35 described, in which the transport network provided is a network to which information is transmitted on the basis of the Internet Protocol, a local device is controlled by assigning to an IP address precisely one

PCM data-stream subscriber line and an entire local device, because this allows IP subscribers to be managed and controlled using control mechanisms which likewise actuate TDM-based communications devices, without the additional need for a high level of development complexity in order to match these devices to IP-based terminals. This allows existing conventional telephone installations also to be used for IP telephony, for example, where conventional telephone installations provide a large quantity of service features, or else makes it possible to control data links to a telephone installation and thus to enhance them with service features.

One advantage of the method described is that the setup of a direct connection between communications terminals relieves the burden on transport-network-specific devices, such as the local switching centers and the conversion devices required for the otherwise necessary data conversion. This makes it possible to increase the performance of the transport network.

In another embodiment of the invention, there is an arrangement for setting up/clearing down and/or sustaining a communications link has means which output at least two control information items to two local devices in the transport network if at least one connection element between these local devices is affected, because this provides a configuration for controlling heterogeneous transport networks which involves transmitting connection information, which is suitable for controlling TDM links, together with the required protocol information item to the local devices affected by the connection setup/clear-down and/or sustenance. Particularly advantageously, one such arrangement likewise allows operation of a mixed infrastructure comprising TDM-based switching centers and IP-based local area networks.

In another embodiment of the invention, there is an arrangement having a central control device which provides transport-network-specific media information or protocol information and makes it available for connection setup. This ensures, in connection with an existing TDM-based communications infrastructure, that the available central database, possibly service feature implementation and application interface, can continue to be used and need be extended only by the protocol- and media-specific information for operating mixed infrastructures.

Compared with the central solution, local provision of the complementary control information required has the advantage that configuration changes affect local areas of local devices and not the entire transport network, which means that a more flexible device is produced in which the respective current stock of control information is requested for connection setup before central control of the transport network when a connection is being set up.

In one aspect of the arrangement, there is a gateway for converting a TDM protocol into the Internet Protocol, because such a gateway can connect TDM-based units to a transport network on which the Internet Protocol is handled.

In another aspect of the arrangement, there is a checking device for checking protocol-specific information for the address of a local device, because this makes it possible to ensure that there is no need for a procedure for converting the communication data into transport-network-specific communication data for communications links between communications terminals associated with a single local device. Advantageously, there is therefore no delay as a result of conversion and no loss of data as a result of conversion methods which may not be loss free.

In still another aspect of the arrangement, there is a mechanism which can produce a short circuit within a TDM data stream between two subscribers to be  
5 connected, because this allows internal communications links to be set up in a technically elegant fashion without using the local switching center and the conversion device.

10 Advantageously, an internal connection is set up, in one embodiment of the arrangement described, by interchanging the reading and writing directions of timeslots in a TDM data stream, because this allows a communications link to be produced within a local  
15 device in a technically most simple manner.

Advantageously, one embodiment of the arrangement described has an Ethernet access facility, because such a network access facility allows a terminal to access  
20 the Ethernet. Such network access cards are available on the market and are a simple and inexpensive solution for producing mixed transport networks with connection elements via the Ethernet.

25 Particularly advantageously, the devices provided for heterogeneous network operation in local devices are incorporated in specific terminals, because such a terminal can be controlled by a TDM-based control mechanism, customary to date, with equipment-specific  
30 stipulation of a single TDM data stream in connection with a single subscriber line and a subscriber line module without any great complexity for aligning control mechanism customary to date.

35 One particular advantage is that in one embodiment of such arrangements, telephones and personal computers are provided as terminals, because these are the terminals which are used most frequently and direct connection of these units to the Ethernet for voice

communication represents great additional benefit for terminal users if they can be operated by a central control mechanism in conjunction with conventional devices.

5

#### BRIEF DESCRIPTION OF THE DRAWINGS

Exemplary embodiments of the invention are explained in more detail below with reference to figures.

10 Figure 1 shows a conventional communications arrangement.

Figure 2 shows an example of a novel communications arrangement.

15

Figure 3 shows an example of a message flow in a known switching system.

Figure 4 shows an example of a message flow using  
20 timeslot-based connection information for the transport network.

Figure 5 shows a communications infrastructure in which different communications protocols are used on  
25 connection element links.

Figure 6 shows a communications infrastructure using IP-based terminals.

30 Figure 7 shows another exemplary embodiment.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 2 shows an example of a flexible arrangement for setting up communications links. By way of example,  
35 this arrangement illustrates the structure of a private branch exchange 250.

Equivalent reference symbols in figure 2 denote the same elements of the device as in figure 1. Looking at

figure 2, it is immediately noticeable that the transport of communication data is triggered by the message traffic of the control messages. To this end, a separate transport network 700 and a separate control network 310/410 are provided in this case. This design of an exchange has the advantage that any already existing networks, such as public or private voice and data networks, can be used for the transport network. Only the control network needs to be routed to the central device ZE2 in this case. The use of conversion devices, such as gateways, advantageously makes it possible to operate and control any hybrid configurations.

The digital or analog communications terminals KE1 and KE2 are in this case shown such that they are respectively connected to subscriber line modules SLM01 and SLM02. Without limiting the invention, however, such an arrangement 250 can also involve and incorporate terminals which can be connected to the transport network 700 directly, with bypassing or without an SLMO. It is also possible to connect ATM terminals or else IP-based (Internet Protocol) terminals. One example of a possible hybrid configuration is shown in figure 5 and is explained in the associated part of the description. Directly connected terminals are shown in figure 6 and are described by the associated part of the description of the figures.

As will also be recognized, the local devices DZ1 and DZ2 each have local switching centers CS1 and CS2 which, by way of example, can be in the form of Ethernet or ATM access devices.

In the case of mixed transport networks, gateways and routers and also media of any type can be connected to one another as required. The illustration likewise shows that the switching matrix MTS0 is no longer used

for connection tasks. Instead, the transport network performs the connection tasks.

In the present arrangement, the control lines 410 and 310 are used to provide at least one respective control information item for the respective local switching centers CS1 and CS2 for the purposes of setting up the communications link, the control information item being derived from a timeslot-based control information item. The information is interchanged using messages. In addition, the figure shows that PCM data are converted into cell data according to the standard of the transport network type 700, such as ATM cell data, on a data link 300 or 400. In this context, it should be noted that the use of an ATM network as transport network serves as an exemplary embodiment. Ethernet networks, other IP connections or even TDM connections are likewise suitable. The selection is dependent on the intended purpose of use and extends to the whole range of available networks and also optical media, both in the narrowband range and in the broadband range.

If appropriate, various transport networks can be provided; in that case, gateways secure the link between the various network sections.

Preferably, the local switching centers CS1 and CS2 perform transport-network-dependent call processing, although this is essentially limited to a basic call functionality. Service features are implemented and provided by the central control mechanism ZE2. Connections between the different local devices are controlled by the central device ZE2 using signaling messages. The advantages of this arrangement are that it has both narrowband capability and broadband capability. It allows the integration of any network types and topologies. In addition, the transport network can be set up both on public networks and on



private networks, or else can comprise a mixture. It is advantageously possible for local devices at a distance without physical limitation to be associated with the central device ZE2, so that powerful devices with a large physical extent can also be provided by such a private branch exchange. The retention of a joint control mechanism means that it is possible to continue to use already existing software with minimal changes. One advantage of such a device 250 over a networked system comprising devices 150 is that the distributed system is a single installation (which is why it is likewise possible to operate service features and applications which are implemented only on an installation-wide basis), because it presents itself as a single installation from an application point of view. This removes the need for conversion of these methods in order to allow them to operate on a network.

Figure 3 shows, in simplified form, an example of a message flow for connection control in a conventional communications system for setting up a connection between two peripheral devices to which the terminal of a subscriber A, TLNA, and the terminal of a subscriber B, TLNB, are connected. The time sequence for the messages, or control messages, is shown from top to bottom. First, the subscriber A goes off-hook and generates the signaling information OFF HOOK. Next, the communication party required is dialed by entering selection information which is forwarded by an equipment-specific interface module DH to the call processing section CP for the subscriber A.

The selection code analysis WABE for the selection information results in a message SEIZURE being forwarded to the call processing section CP for the subscriber B. An equipment-specific interface module DH which is responsible at that point assigns the connection an explicit timeslot, for example ZS1, for a defined PCM data link, for example PD1, and generates

the control message TSL\_ASSIGN for the subscriber line module SLMO1. This control message sends the subscriber line module SLMO1 the explicit timeslot ZS1 and the stipulated PCM data link PD1 which are to be used for the connection. The explicit timeslot ZS1 for the PCM data link PD1 transports communication data on the connection element between subscriber line module SLMO1 and MTS. A second explicit timeslot ZS2 for a second explicitly stipulated PCM data link PD2 is needed for the connection element between MTS and subscriber line module SLMO2. The control information ZS2 and PD2 is communicated to the subscriber line module SLMO2, again using a control message TSL\_ASSIGN.

For physically connecting individual subscribers, TDM-based private branch exchanges use a TDM switching matrix MTS. For this switching matrix, a setting instruction PATH\_CONNECT1 is transmitted which causes the timeslot ZS1 for PCM data link PD1 to be connected to the timeslot ZS2 for the PCM data link PD2. This means that the two connection elements are connected to form a continuous link between SLMO1 and SLMO2.

To carry out the method, it does not matter whether CP and DH are part of the control software and whether they are in the form of individual modules or in integrated form.

Figure 4 shows, in simplified form, an example of a message flow between two local devices, for the purposes of connection control. Connected to these devices are the terminal of a subscriber A, TLNA, and the terminal of a subscriber B, TLNB. The transport network used in this case is, by way of example, an ATM network. The time sequence for the messages is again shown from top to bottom.

A functional unit STMA, as gateway, converts the timeslots for the PCM data stream into a cell stream of

ATM cells. In the exemplary embodiment shown in figure 2, the conversion device is respectively incorporated in the local switching center CS1 or CS2 and is therefore not shown separately.

5

The message flow differs from the flow shown in figure 3 after the point at which the setting instruction PATH\_CONNECT1 is transmitted for the TDM switching matrix. Instead of a setting instruction PATH\_CONNECT1, this embodiment involves the generation of a control message PATH\_CONN2 which is sent to the local switching centers. These then set up a connection in the transport network. When an ATM transport network is used, an ATMSVC is set up (ATM Switched Virtual Connection), for example using stipulated ATM signaling methods.

To this end, the control message PATH\_CONN2 includes the timeslot information and data link information ZS and PD, which can be taken directly from the setting message PATH\_CONNECT1, for example. In addition, the central control device needs to indicate the transport-network-dependent address of the local switching center to which the connection is to be set up. That is to say that the data which need to be provided for the central control mechanism as information relating to the transport network are limited to the transport-network-dependent addresses for the respective local switching centers. The central control device again ascertains the necessary addresses from the timeslot information and data link information ZS and PD. Association tables in a central database DB control the mapping of timeslot/data link to local switching center.

35 This principle is also suitable for controlling heterogeneous transport networks. It may be necessary additionally to store the network type and the available gateway at the same time.

The control message PATH\_CONN2 can also include other information, and this can also be generated in a plurality of more specific forms. If connections having different bandwidths need to be set up, it can include  
5 information about the required bandwidth. Alternatively, the bandwidth information can also be interchanged directly between subscriber line module and switching center.

10 When the local switching centers have set up a connection in the transport network 700 after receiving the PATH\_CONN2 message, the connection is used to transmit the user data. The user data stream on the data link 300/400 between subscriber line module and  
15 local device DZ is assigned to a connection between DZ1 and DZ2 by mapping timeslot indication ZS and PD for the connection identifier for the connection.

This means that, despite the possibly complicated flows  
20 when setting up a connection via the transport network, the central control mechanism ZE2 need forward only these addresses to the call processing section of the transport network in order to set up a connection there. The rest is handled by the transport-network-  
25 specific call processing section.

On the basis of this message flow, the PATH\_CONNECT instruction is thus replaced by transport-network-specific call processing. To be able to connect TDM-  
30 based subscribers independently of transport network using local switching centers, it is necessary to convert timeslots into transport units. This is done in a conversion unit, such as STMA, of which there is at least one, preferably looped into the path of the user  
35 data, for each local device. For this purpose, an ATM-PCM gateway, an IP-PCM gateway or another required gateway can be provided.

However, the method described is not limited to dialup

connections which are set up dynamically, but can also be used for an ATMPVC (ATMPVC Permanent virtual connection). The information relating to the address may then need to be complemented by information which regulates the use of permanent connections. In addition, other forms of data transmission can also be used, such as IP connections or FDDI (Fiber Distributed Data Interface), etc.

Figure 5 shows as an exemplary embodiment a communications arrangement in which local devices DZ are connected to one another by a heterogeneous transport network, the connections in this transport network being distinguished in that connection elements are produced using different communications media or by handling different communications protocols on these connection elements.

Like the arrangement shown and described in figure 2, this mixed communications system is also controlled by a central control device, with control messages being transmitted by the central control mechanism and being sent to the local switching centers CS in order to set up a connection and to sustain or clear down the connection. In this case too, message interchange is effected via a control network, although this control network is not shown to preserve the clarity of the illustration. The reference symbols in the figure can be interpreted in the same way as the reference symbols in the description of the other figures. Unless explicitly mentioned otherwise, functional elements with the same name in the figure also have the same scope of functions in this case.

Specifically, the figure shows local devices DZ10 to DZ40 which have subscriber line modules for communications terminals SLMD10 to SLMD40 (not shown). In addition, conversion devices U are provided in the respective local devices DZ, which carry out media

alignment or protocol alignment among the different connection element links.

In addition, local switching centers CS10 to CS40 are shown. The conversion devices and the subscriber line modules SLMD have TDM data links 301 to 304 between them. Specifically, the local devices DZ have the connection element links 71030, 72030, 72040 and 73020 between them. The connections 72040 and 73020 are, by way of example, transport network connection elements based on an ATM network. On the connections 72030 and 71030 shown, the communications protocol used is the Internet Protocol.

The Internet Protocol IP can be used both on an ATM connection and on an Ethernet connection. On the basis of the ISO/OSI (Open Systems Interconnect) protocol standard, the upper layers of a communications protocol can be used on different media. Specifically, this standardized protocol comprises seven layers, with the bottommost layer being the physical layer, the second layer being the data link layer, the third layer being the network layer, the fourth layer being the transport layer, the fifth layer being the session layer, the sixth layer being the presentation layer and the seventh layer being the application layer. In the case of this layer protocol standardized on the basis of ISO IS8802, each layer uses the services of the layer below it. Messages, for example in the form of control messages, which are transmitted using this layer protocol thus progressively receive an additional information item per layer, which produces a data structure in which the original messages have seven layer-specific information elements added to them. Within the context of this communications protocol, any communications media and any layers can thus be coupled to one another.

The conversion devices U are necessary in order to

match the different layer structures to one another. By way of example, the conversion device U20 converts ATM cell data into TDM data. These ATM cell data can then be forwarded directly as ATM cell data, for example in  
 5 the local device DZ20 via the local switching center CS20 and via the connection element link 73020.

However, it is likewise possible to forward them to a conversion device U2030 which is in the form of an  
 10 ATM/IP gateway, for example. There, ATM cell data are conditioned for the Internet Protocol and can then be forwarded via the connection elements 72030 to the local switching center CS30 for the local device DZ 30. The remarkable aspect of this configuration is thus  
 15 that terminals on the local device DZ20 can communicate with terminals on the local device DZ30 using the Internet Protocol and can also be reached directly on the basis of the asynchronous transfer mode.

20 To be able to actuate the different connection element links 72030 and 73020, a central control device thus requires appropriate complementary control information for control messages for controlling connection setup between communications subscribers, said control  
 25 information relating to the type of connection path and protocol-specific information, i.e. gateways to be used.

The conversion device U2030 in the local device DZ30 is  
 30 in the form of an ATM/IP gateway, for example. The local switching center CS30 is, by way of example, an IP router or switch, while U30 is in the form of an TDM/IP gateway. Similarly, the local switching center CS10 for the local device DZ10 is in the form of an IP  
 35 router/switch, while the conversion device U1030 is in the form of a TDM/IP gateway.

The local device DZ40 likewise contains a local switching center CS40 in the form of an ATM switching

section connected to a conversion device U40 which converts TDM data into ATM cell data.

Additional information for the control mechanism about the reachability of the individual subscribers using particular gateways and about particular conversion devices and switching centers, and also the associated local devices thereof, is stored in a central control device's data store, for example.

10           This centrally stored information can either be distributed to the local units and can thus be the basis for a separate decision by the local units about communications protocols to be used and usable  
15 transport media when a connection is set up, or the decision is made in the central station and is communicated to the local device.

On the basis of the control information in this  
20 database, an appropriate number of control messages are  
produced for one or more respective connection  
elements, such as from DZ40 to DZ10, via the connection  
elements 72040 and 71030, said control messages being  
transmitted to the respective local switching centers  
25 in order to control connection setup, for example.

The connection variants shown here naturally represent only some of the technically possible variants of connection element links, communications media, 30 communications protocols and conversion devices to which the invention can be applied without restriction, which cannot all be listed.

By way of example, it is likewise possible for local  
35 data stores to be provided in the area of local devices  
DZ, the stock of information in the data stores being  
limited to devices which are present in the respective  
local devices DZ. For the case of connection control,  
although the central control mechanism then needs to



request this information first, such configurations have the advantage that local devices can also be serviced and maintained locally. There is also redundancy in the data storage and better availability  
5 of the communications devices, because the failure of a local data store does not affect the entire network.

By way of example, it is likewise possible for the area of local devices DZ to receive data from the central  
10 station whose stock of information is limited to the partner devices of local devices.

For the case of connection control, the local device can then make an independent decision about the use of  
15 the correct gateways.

A particular advantage of a communications arrangement as shown is that any infrastructures can be matched to one another, and that the specifically directed  
20 controllability of the connection element links and of the conversion devices required allows resource-saving connection setup in which unnecessary conversion steps for protocol or media alignment can be avoided in the best way.

25 Similarly, transport networks of any heterogeneity can be controlled by any central control device without complex technical developments in terms of alignment, because transport-network-specific call processing can  
30 advantageously be used which is based on information produced by a TDM-based control mechanism.

The specific way in which this can be done has already been described in the explanation of figure 4. The data  
35 storage required in such an arrangement can be limited to a minimum degree, because the transport-network-specific data additionally need to be stored. Similarly, such a communications device brings the advantages of a single private branch exchange to bear,

such as the central availability of service features, the central administrability and a central application interface. Advantageously, a plurality of different, possibly already existing, network sections thus produce a standard communications system which has the outward appearance of a single installation but which can be flexibly matched to the technical requirements of the customer by virtue of the choice of conversion devices.

10

Figure 6 shows a particularly advantageous communications arrangement with communications terminals KE10 to KE40 which are connected via an Ethernet and are controlled from a central device ZE 100 via a control network STN. In this case, the connection can be set up both via an Ethernet and via an ATM network, and/or using a hybrid configuration of the transport network. In this embodiment of an arrangement, the devices required for producing, for setting up, for clearing down and for sustaining communications links, which were also included in a local device DZ in the description for figure 5, have been incorporated in one communications terminal KE. The number and selection of available components per terminal depends on the type of communications protocols used and on the communications media which are available.

Such an arrangement provides the option of connecting telephone subscribers to TDM subscribers using the Internet Protocol. In this case, the central control mechanism carries out call processing for the TDM subscribers. As regards the IP telephone subscribers, the functionality of their devices needs to be extended, for example, so that they can provide the scope of functions standardized on the basis of ITU protocols H.323 and H.450. This can advantageously be done by virtue of the equipment-specific alignment modules DH being equipped with the functions of the

H.323 and H.450 protocols for the purposes of actuating IP subscribers. This variant arrangement is particularly advantageous because telephony based on the Internet Protocol can easily be linked to TDM-based telephony. The development complexity for matching the central control device ZE100 to the communications terminals KE is minimal in this context and requires only the development of a specific software module DH.

The local switching centers for the communications terminals KE exist, by way of example, in the form of network driver cards for the Ethernet. A clear relationship between Internet addresses (IP addresses) and the connection features of a TDM connection can be produced by assigning an IP address precisely one local device having a subscriber line module and a subscriber line, for example, which device can in turn be reached via precisely one TDM data path. The local device, the subscriber line module, the subscriber line and the TDM data path are not physically present in this case, but rather are set up fictitiously in the software. This makes it possible to continue to use normal control with no great complexity of change. The changes are then for the most part limited to configuration data.

Figure 7 shows a partial view of the illustration from figure 5 in order to explain an advantageous embodiment of a communications arrangement and a specific mode of operation of this arrangement. The reference symbols are used in a similar manner to in the other figures in this case. The fact that this illustration shows only two local devices DZ20 and DZ40 need not mean that such an embodiment of a communications arrangement can be limited to just two local devices. Instead, every local device in a communications arrangement can be equipped with the advantageous refinements which will be discussed below.

In contrast to the illustration in figure 5, this



information about the communications subscribers involved is required. As complementary information, information about the address of local devices to which these communications terminals are connected is  
 5 additionally provided for specifically directed connection setup.

In an arrangement of the type illustrated in figure 7, the protocol-specific information analyzed is the  
 10 address of the local device, and if the addresses of the local devices DZ involved and of the terminals to be connected are identical, i.e. terminals connected to the same local device DZ, conversion of the TDM data is prevented and a direct connection is produced between  
 15 the terminals. This has the advantage that the conversion device, in this case U20, is available for other conversion procedures, that the transport network is not burdened by such procedures, no charges arise in the transport network and similarly the local switching  
 20 center can perform other tasks. Hence, in this case, the handling of a connection involves the address of a local device for communications terminals KE affected thereby being checked in a respective local device DZ. Advantageously, if the result of this check is  
 25 positive, a signal is output to an access chip for the TDM data stream, the task of which is to tap off the timeslots from the TDM data stream, or to pass them to the TDM data stream. Using this signal, this chip, for example, produces a short circuit such that the reading  
 30 and writing directions of the communications terminals involved are interchanged with one another. This chip may possibly be in the form of a switching matrix.

The addresses can be checked both in the local device  
 35 and in the central device. In the case of a central check, the local switching center is informed that a short circuit needs to be introduced.

Description

COMMUNICATIONS SYSTEM AND METHOD

5

CLAIM FOR PRIORITY

This application claims priority  
Application No. PCT/DE00/03207 which  
the German language on September 14, 2

Mark up  
copy of  
the Specification

10

TECHNICAL FIELD OF THE INVENTION

The invention relates to a method and an arrangement  
for setting up and clearing down, and sustaining,  
communications links, and in particular, within the  
context of a private branch exchange and terminals  
15 which are to be connected.

BACKGROUND OF THE INVENTION

20

The rising volume of communication, as a result of an  
increasing number of communications subscribers and  
rising demands on the volume of data to be transmitted,  
places greater and greater demands on switching  
centers, in particular on private branch exchanges,  
with regard to the volume of data to be transmitted for  
each communications link and the number of  
25 communications terminals which are to be connected to  
one another.

30

Current devices are based, by way of example, on the  
TDM method (Time Division Multiplexing), in which  
communications data on different connections are  
transmitted in respectively defined timeslots. A  
connection between different communication parties is  
set up by a switching matrix which assigns incoming  
timeslots on an incoming connection outgoing timeslots  
35 to an outgoing connection on the basis of a control  
information item. Such switching matrices are generally  
of fixed proportions and can set up only a defined  
number of connections, which often makes it difficult  
to match exchanges to requirements. Another problem

with such devices is that the timeslots are able to hold only a limited amount of data.

On account of different strengths and weaknesses of networks when transporting voice and data in the local domain, various communications networks have become established for specific purposes of use.

Figure 1 shows an example of a known private branch exchange 150 with two peripheral devices P1 and P2 to which a communications terminal KE1 and KE2 operating on a digital or analog basis is respectively connected. These peripheral devices P1 and P2 are accommodated in the same physical area as the central device ZE1. By way of example, they are in the same room or in the same cabinet as it. The terminals occupy defined timeslots in the PCM data stream (Pulse Code Modulation) with communication data. The digital or analog communications terminals KE1 and KE2 are respectively connected to subscriber line modules SLM01 and SLM02 which supply or take digital data, intended for the respective terminals or coming from the respective terminals, to/from the PCM data stream using timeslots stipulated by signaling. These PCM data streams are denoted by 100 and 200 in figure 1. In addition, signaling connections are shown which are represented by 110 and 210. It should be noted that these involve a logical representation and not a physical representation. In reality, however, the transport data and the signaling data are transmitted in the same connecting cable.

This figure also shows peripheral devices P1 and P2 and supply modules LTUC1 and LTUC2 which regulate the data traffic to the subscriber line modules of the respective peripheral devices. The peripheral device P1 is supplied with signaling data via the line 110, and the peripheral device P2 is supplied with signaling data via the signaling line 210.

As can clearly be seen here, this arrangement involves both the information to be transported and the signaling information being supplied to a central device ZE1. In this context, a messaging device DCL  
5 collects and distributes messages 2 which are interchanged between the central device ZE1 and the peripheral devices P1, P2. The call processing section CP controls the setup and clear-down of connections and, to this end, uses equipment-specific interface  
10 functions DH, inter alia, which are in the form of program modules, for example. This involves producing setting instructions 1 for the switching matrix MTS. These setting instructions essentially indicate which input of the switching matrix is to be connected  
15 to which output in order to provide The object on which the invention is based is that of specifying another method and an arrangement for providing a communications link which ensure a high level of  
20 flexibility in terms of matching to network infrastructures. Control and connection functions are thus performed by a single physically incorporated functional unit in the communications network.

25 Problems arise with such configurations because the  
data to be transported need to be supplied to the  
central device ZE1. This is the case even if, by way of  
example, two communications terminals which are  
connected to the same peripheral device P1 need to  
30 communicate with one another. The wiring complexity  
required for such devices increases with increasing  
distance between the terminals and the central device  
ZE1, which means that this type of arrangement  
restricts the extent of a private branch exchange or  
35 makes installation much more expensive when covering  
relatively large areas.

In such devices, problems likewise arise with regard to modular extendibility both in terms of the number of  
40 connections and in terms of the volume of data to be



\*\*\*\*\*

transmitted. This type of embodiment does not allow different data rates for each individual communications link.

- 5 Alignment and/or transparent integration of different network infrastructures is likewise not possible.

#### SUMMARY OF THE INVENTION

10 The invention specifies a method and an arrangement for providing a communications link which ensure a high level of flexibility in terms of matching to network infrastructures and in terms of the physical extent thereof.

15 ~~This object is achieved for the method on the basis of the features of patent claim 1 and for the arrangement on the basis of the features of patent claim 8. Developments of the invention can be found in the dependent claims.~~

20 A particular advantage is that the inventive method allows One advantage of the invention is the operation of a heterogeneous communications network using a joint control mechanism, because information about the type of protocol which can be used to reach respective subscribers is held in the area of the central control mechanism, or in the transport network. Advantageously, the topology of the transport network can differ from that of the control network in this context. This makes it possible to set up a communications link while avoiding numerous diverse conversion procedures which would be necessary on a previously stipulated path between the subscribers. This advantageously takes account of the fact that the subscribers communicate using different communications protocols, with local matching to the required communications protocol, as opposed to central matching, allowing the communications path to be routed via a minimal number of conversion devices, which protects the resources in the network and keeps down the length of the

25  
30  
35  
40

communications paths in the transport network.

~~A particular advantage is that one development of~~ In  
one embodiment of the invention, the method described  
 5 provides not only the protocol information item but  
 also a media information item relating to the transport  
 network, because this makes it possible to take into  
 account the characteristic of different transmission  
 media in terms of transport quality, utilization and  
 10 speed when controlling the connection setup.

~~A particular advantage is that one development of~~ In  
another embodiment of the invention, the method  
 described allows the different protocol structure of  
 15 communications protocols handled on a single medium or  
 on different media to be taken into account by  
 actuating suitable protocol conversion units,  
 associated with communications subscribers which are  
 involved, in an appropriately defined manner when  
 20 setting up and sustaining the connection.

~~A particular advantage is that one development of~~ In  
still another embodiment of the invention, the method  
 described allows a defined media access device to be  
 25 actuated for a particular communications subscriber. If  
 a plurality of transport media are available for each  
 communications subscriber, this advantageously allows  
 them to be specifically taken into account and actuated  
 when a connection is set up.

30 ~~A particular advantage is that one development of~~ In  
another embodiment of the invention, the method  
 described allows the information required for  
 controlling the transport network to be set up and/or  
 35 provided centrally, because the problem of updating,  
 maintaining and saving these data is then limited to  
 the maintenance of a central database.

Advantageously, one development aspect of the method  
 40 described affords the opportunity for required control

information to be provided locally in the transport network and for the control mechanism to request it when a connection is set up, because this allows local measures for aligning the transport network to be taken  
5 without such measures affecting the entire transport network and a central control mechanism.

Advantageously, in ~~one development~~ another aspect of the method described, in which the transport network  
10 provided is a network to which information is transmitted on the basis of the Internet Protocol, a local device is controlled by assigning to an IP address precisely one PCM data-stream subscriber line and an entire local device, because this allows IP  
15 subscribers to be managed and controlled using control mechanisms which likewise actuate TDM-based communications devices, without the additional need for a high level of development complexity in order to match these devices to IP-based terminals. This allows  
20 existing conventional telephone installations also to be used for IP telephony, for example, where conventional telephone installations provide a large quantity of service features, or else makes it possible to control data links to a telephone installation and  
25 thus to enhance them with service features.

~~A great~~ One advantage of ~~one development~~ of the method described is that the setup of a direct connection between communications terminals relieves the burden on  
30 transport-network-specific devices, such as the local switching centers and the conversion devices required for the otherwise necessary data conversion. This makes it possible to increase the performance of the transport network.

35  
~~Particularly advantageously,~~ In another embodiment of the invention, there is an arrangement for setting up/clearing down and/or sustaining a communications link has means which output at least two control  
40 information items to two local devices in the transport

network if at least one connection element between these local devices is affected, because this provides a configuration for controlling heterogeneous transport networks which involves transmitting connection  
 5 information, which is suitable for controlling TDM links, together with the required protocol information item to the local devices affected by the connection setup/clear-down and/or sustenance. Particularly advantageously, one such arrangement likewise allows  
 10 operation of a mixed infrastructure comprising TDM-based switching centers and IP-based local area networks.

~~A particular advantage is that one development of such~~  
 15 In another embodiment of the invention, there is an arrangement has having a central control device which provides transport-network-specific media information or protocol information and makes it available for connection setup. This ensures, in connection with an  
 20 existing TDM-based communications infrastructure, that the available central database, possibly service feature implementation and application interface, can continue to be used and need be extended only by the protocol- and media-specific information for operating  
 25 mixed infrastructures.

Compared with the central solution, local provision of the complementary control information required has the advantage that configuration changes affect only local  
 30 areas of local devices and not the entire transport network, which means that a more flexible device is produced in which the respective current stock of control information is requested for connection setup before central control of the transport network only  
 35 when a connection is being set up.

~~Advantageously, one development~~ In one aspect of the arrangement ~~described has,~~ there is a gateway for converting a TDM protocol into the Internet Protocol,  
 40 because such a gateway can connect TDM-based units to a



for heterogeneous network operation in local devices are incorporated in specific terminals, because such a terminal can be controlled by a TDM-based control mechanism, customary to date, with equipment-specific stipulation of a single TDM data stream in connection with a single subscriber line and a subscriber line module without any great complexity for aligning control mechanism customary to date.

One particular advantage is that in one development embodiment of such arrangements provides, telephones and personal computers are provided as terminals, because these are the terminals which are used most frequently and direct connection of these units to the Ethernet for voice communication represents great additional benefit for terminal users if they can be operated by a central control mechanism in conjunction with conventional devices.

#### 20                    BRIEF DESCRIPTION OF THE DRAWINGS

Exemplary embodiments of the invention are explained in more detail below with reference to figures.

Figure 1 shows a conventional communications arrangement<sub>7.</sub>

Figure 2 shows an example of a novel communications arrangement<sub>7.</sub>

Figure 3 shows an example of a message flow in a known switching system<sub>7.</sub>

Figure 4 shows an example of a message flow using timeslot-based connection information for the transport network<sub>7.</sub>

Figure 5 shows a communications infrastructure in which different communications protocols are used on connection element links<sub>7.</sub>



device ZE1. In this context, a messaging device DCL  
 collects and distributes messages 2 which are  
 interchanged between the central device ZE1 and the  
 peripheral devices P1, P2. The call processing section  
 5 CP controls the setup and clear down of connections  
 and, to this end, uses equipment specific interface  
 functions DH, inter alia, which are in the form of  
 program modules, for example. This involves producing  
 setting instructions 1 for the switching matrix MTS.  
 10 These setting instructions essentially indicate which  
 input of the switching matrix is to be connected to  
 which output in order to provide a communications link.  
 Control and connection functions are thus performed by  
 a single physically incorporated functional unit in the  
 15 communications network.

Problems arise with such configurations because all the  
 data to be transported need to be supplied to the  
 central device ZE1. This is the case even if, by way of  
 20 example, two communications terminals which are  
 connected to the same peripheral device P1 need to  
 communicate with one another. The wiring complexity  
 required for such devices increases with increasing  
 distance between the terminals and the central device  
 25 ZE1, which means that this type of arrangement  
 restricts the areal extent of a private branch exchange  
 or makes installation much more expensive when covering  
 relatively large areas.

30 In such devices, problems likewise arise with regard to  
 modular extendibility both in terms of the number of  
 connections and in terms of the volume of data to be  
 transmitted. This type of embodiment does not allow  
 different data rates for each individual communications  
 35 link.

Alignment and/or transparent integration of different  
 network infrastructures is likewise not possible.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

40 Figure 2 shows an example of a flexible arrangement for



setting up communications links. By way of example, this arrangement illustrates the structure of a private branch exchange 250.

5 Equivalent reference symbols in figure 2 denote the same elements of the device as in figure 1. Looking at figure 2, it is immediately noticeable that the transport of communication data is triggered by the message traffic of the control messages. To this end, a  
 10 separate transport network 700 and a separate control network 310/410 are provided in this case. This design of an exchange has the advantage that any already existing networks, such as public or private voice and data networks, can be used for the transport network.  
 15 Only the control network needs to be routed to the central device ZE2 in this case. The use of conversion devices, such as gateways, advantageously makes it possible to operate and control any hybrid configurations.

20 The digital or analog communications terminals KE1 and KE2 are in this case shown such that they are respectively connected to subscriber line modules SLM01 and SLM02. Without limiting the invention, however,  
 25 such an arrangement 250 can also involve and incorporate terminals which can be connected to the transport network 700 directly, with bypassing or without an SLM0. It is also possible to connect ATM terminals or else IP-based (Internet Protocol)  
 30 terminals. One example of a possible hybrid configuration is shown in figure 5 and is explained in the associated part of the description. Directly connected terminals are shown in figure 6 and are described by the associated part of the description of  
 35 the figures.

As will also be recognized, the local devices DZ1 and DZ2 each have local switching centers CS1 and CS2 which, by way of example, can be in the form of  
 40 Ethernet or ATM access devices.

In the case of mixed transport networks, gateways and routers and also media of any type can be connected to one another as required. The illustration likewise  
 5 shows that the switching matrix MTS0 is no longer used for connection tasks.

Instead, the transport network performs the connection tasks.

10 In the present arrangement, ~~to this end~~, the control lines 410 and 310 are used to provide at least one respective control information item ~~just~~ for the respective local switching centers CS1 and CS2 for the purposes of setting up the communications link, ~~said~~  
 15 the control information item being derived from a timeslot-based control information item. The information is interchanged using messages. In addition, the figure shows that PCM data are converted into cell data according to the standard of the  
 20 transport network type 700, such as ATM cell data, on a data link 300 or 400. In this context, it should be noted that the use of an ATM network as transport network serves ~~only~~ as an exemplary embodiment. Ethernet networks, other IP connections or even TDM  
 25 connections are likewise suitable. The selection is dependent on the intended purpose of use and extends to the whole range of available networks and also optical media, both in the narrowband range and in the broadband range.

30 If appropriate, various transport networks can be provided; in that case, gateways secure the link between the various network sections.

35 Preferably, the local switching centers CS1 and CS2 perform transport-network-dependent call processing, although this is essentially limited to a basic call functionality. Service features are implemented and provided by the central control mechanism ZE2.  
 40 Connections between the different local devices are

controlled by the central device ZE2 using signaling messages. The advantages of this arrangement are that it has both narrowband capability and broadband capability. It allows the integration of any network types and topologies. In addition, the transport network can be set up both on public networks and on private networks, or else can comprise a mixture. It is advantageously possible for local devices at a distance without physical limitation to be associated with the central device ZE2, so that powerful devices with a large physical extent can also be provided by such a private branch exchange. The retention of a joint control mechanism means that it is possible to continue to use already existing software with minimal changes. One advantage of such a device 250 over a networked system comprising devices 150 is that the distributed system is a single installation (which is why it is likewise possible to operate service features and applications which are implemented only on an installation-wide basis), because it presents itself as a single installation from an application point of view. This removes the need for conversion of these methods in order to allow them to operate on a network.

Figure 3 shows, in simplified form, an example of a message flow for connection control in a conventional communications system for setting up a connection between two peripheral devices to which the terminal of a subscriber A, TLNA, and the terminal of a subscriber B, TLNB, are connected. The time sequence for the messages, or control messages, is shown from top to bottom. First, the subscriber A goes off-hook and generates the signaling information OFF HOOK. Next, the communication party required is dialed by entering selection information which is forwarded by an equipment-specific interface module DH to the call processing section CP for the subscriber A.

The selection code analysis WABE for the selection information results in a message SEIZURE being



shown from top to bottom.

A functional unit STMA, as gateway, converts the timeslots for the PCM data stream into a cell stream of  
 5 ATM cells. In the exemplary embodiment shown in figure 2, the conversion device is respectively incorporated in the local switching center CS1 or CS2 and is therefore not shown separately.

10 The message flow differs from the flow shown in figure 3 ~~only~~ after the point at which the setting instruction PATH\_CONNECT1 is transmitted for the TDM switching matrix. Instead of a setting instruction PATH\_CONNECT1, this embodiment involves the generation of a control  
 15 message PATH\_CONN2 which is sent to the local switching centers. These then set up a connection in the transport network. When an ATM transport network is used, an ATMSVC is set up (ATM Switched Virtual Connection), for example using stipulated ATM signaling  
 20 methods.

To this end, the control message PATH\_CONN2 ~~needs to contain~~ includes the timeslot information and data link information ZS and PD, which can be taken directly from  
 25 the setting message PATH\_CONNECT1, for example. In addition, the central control device needs to indicate ~~just~~ the transport-network-dependent address of the local switching center to which the connection is to be set up. That is to say that the data which need to be  
 30 provided for the central control mechanism as information relating to the transport network are limited to the transport-network-dependent addresses for the respective local switching centers. The central control device again ascertains the necessary addresses  
 35 from the timeslot information and data link information ZS and PD. Association tables in a central database DB control the mapping of timeslot/data link to local switching center.

40 This principle is also suitable for controlling

heterogeneous transport networks. It may be necessary additionally to store the network type and the available gateway at the same time.

- 5 The control message PATH\_CONN2 can also ~~contain~~ include other information, and this can also be generated in a plurality of more specific forms. If connections having different bandwidths need to be set up, it can include ~~contain~~
- 10 information about the required bandwidth. Alternatively, the bandwidth information can also be interchanged directly between subscriber line module and switching center.
- 15 When the local switching centers have set up a connection in the transport network 700 after receiving the PATH\_CONN2 message, ~~said~~ the connection is used to transmit the user data. The user data stream on the data link 300/400 between subscriber line module and
- 20 local device DZ is assigned to a connection between DZ1 and DZ2 by mapping timeslot indication ZS and PD for the connection identifier for the connection.

This means that, despite the possibly complicated flows

25 when setting up a connection via the transport network, the central control mechanism ZE2 need forward only these addresses to the call processing section of the transport network in order to set up a connection there. The rest is handled by the transport-network-

30 specific call processing section.

On the basis of this message flow, the PATH\_CONNECT instruction is thus replaced by transport-network-specific call processing. To be able to connect TDM-

35 based subscribers independently of transport network using local switching centers, it is necessary to convert timeslots into transport units. This is done in a conversion unit, such as STMA, of which there is at least one, preferably looped into the path of the user

40 data, for each local device. For this purpose, an ATM-

PCM gateway, an IP-PCM gateway or another required gateway can be provided.

However, the method described is not limited to dialup  
 5 connections which are set up dynamically, but can also  
 be used for an ATMPVC (ATMPVC Permanent virtual  
 connection). The information relating to the address  
 may then need to be complemented by information which  
 regulates the use of permanent connections. In  
 10 addition, other forms of data transmission can also be  
 used, such as IP connections or FDDI (Fiber Distributed  
 Data Interface), etc.

Figure 5 shows as an exemplary embodiment a  
 15 communications arrangement in which local devices DZ  
 are connected to one another by a heterogeneous  
 transport network, the connections in this transport  
 network being distinguished in that connection elements  
 are produced using different communications media or by  
 20 handling different communications protocols on these  
 connection elements.

Like the arrangement shown and described in figure 2,  
 this mixed communications system is also controlled by  
 25 a central control device, with control messages being  
 transmitted by the central control mechanism and being  
 sent to the local switching centers CS in order to set  
 up a connection and to sustain or clear down the  
 connection. In this case too, message interchange is  
 30 effected via a control network, although this control  
 network is not shown to preserve the clarity of the  
 illustration. The reference symbols in the figure can  
 be interpreted in the same way as the reference symbols  
 in the description of the other figures. Unless  
 35 explicitly mentioned otherwise, functional elements  
 with the same name in the figure also have the same  
 scope of functions in this case.

Specifically, the figure shows local devices DZ10 to  
 40 DZ40 which have subscriber line modules for





The conversion devices U are necessary in order to match the different layer structures to one another. By way of example, the conversion device U20 converts ATM  
 5 cell data into TDM data. These ATM cell data can then be forwarded directly as ATM cell data, for example in the local device DZ20 via the local switching center CS20 and via the connection element link 73020.

10 However, it is likewise possible to forward them to a conversion device U2030 which is in the form of an ATM/IP gateway, for example. There, ATM cell data are conditioned for the Internet Protocol and can then be forwarded via the connection elements 72030 to the  
 15 local switching center CS30 for the local device DZ 30. The remarkable aspect of this configuration is thus that terminals on the local device DZ20 can communicate with terminals on the local device DZ30 using the Internet Protocol and can also be reached directly on  
 20 the basis of the asynchronous transfer mode.

To be able to actuate the different connection element links 72030 and 73020, a central control device thus requires appropriate complementary control information  
 25 for control messages for controlling connection setup between communications subscribers, said control information relating to the type of connection path and protocol-specific information, i.e. gateways to be used.

30

The conversion device U2030 in the local device DZ30 is in the form of an ATM/IP gateway, for example. The local switching center CS30 is, by way of example, an IP router or switch, while U30 is in the form of an  
 35 TDM/IP gateway. Similarly, the local switching center CS10 for the local device DZ10 is in the form of an IP router/switch, while the conversion device U1030 is in the form of a TDM/IP gateway.

40 The local device DZ40 likewise contains a local

switching center CS40 in the form of an ATM switching section connected to a conversion device U40 which converts TDM data into ATM cell data.

5 Additional information for the control mechanism about the reachability of the individual subscribers using particular gateways and about particular conversion devices and switching centers, and also the associated local devices thereof, is stored in a central control  
10 device's data store, for example.

This centrally stored information can either be distributed to the local units and can thus be the basis for a separate decision by the local units about  
15 communications protocols to be used and usable transport media when a connection is set up, or the decision is made in the central station and is communicated to the local device.

20 On the basis of the control information in this database, an appropriate number of control messages are produced for one or more respective connection elements, such as from DZ40 to DZ10, via the connection elements 72040 and 71030, said control messages being  
25 transmitted to the respective local switching centers in order to control connection setup, for example.

The connection variants shown here naturally represent only, some of the technically possible variants of  
30 connection element links, communications media, communications protocols and conversion devices to which the invention can be applied without restriction, which cannot all be listed.

35 By way of example, it is likewise possible for local data stores to be provided in the area of local devices DZ, the stock of information in ~~said~~ the data stores being limited ~~only~~ to devices which are present in the respective local devices DZ. For the case of connection  
40 control, although the central control mechanism then

needs to request this information first, such configurations have the advantage that local devices can also be serviced and maintained locally. There is also redundancy in the data storage and better  
5 availability of the communications devices, because the failure of a local data store does not affect the entire network.

By way of example, it is likewise possible for the area  
10 of local devices DZ to receive data from the central station whose stock of information is limited to the partner devices of local devices.

For the case of connection control, the local device  
15 can then make an independent decision about the use of the correct gateways.

A particular advantage of a communications arrangement as shown is that any infrastructures can be matched to  
20 one another, and that the specifically directed controllability of the connection element links and of the conversion devices required allows resource-saving connection setup in which unnecessary conversion steps for protocol or media alignment can be avoided in the  
25 best way.

Similarly, transport networks of any heterogeneity can be controlled by any central control device without complex technical developments in terms of alignment,  
30 because transport-network-specific call processing can advantageously be used which is based on information produced by a TDM-based control mechanism.

The specific way in which this can be done has already  
35 been described in the explanation of figure 4. The data storage required in such an arrangement can be limited to a minimum degree, because ~~only~~ the transport-network-specific data additionally need to be stored. Similarly, such a communications device brings the  
40 advantages of a single private branch exchange to bear,

11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

such as the central availability of service features,  
the central administrability and a central application  
interface. Advantageously, a plurality of different,  
possibly already existing, network sections thus  
5 produce a standard communications system which has the  
outward appearance of a single installation but which  
can be flexibly matched to the technical requirements  
of the customer by virtue of the choice of conversion  
devices.

10  
Figure 6 shows a particularly advantageous  
communications arrangement with communications  
terminals KE10 to KE40 which are connected via an  
Ethernet and are controlled from a central device  
15 ZE 100 via a control network STN. In this case, the  
connection can be set up both via an Ethernet and via  
an ATM network, and/or using a hybrid configuration of  
the transport network. In this embodiment of an  
arrangement, the devices required for producing, for  
20 setting up, for clearing down and for sustaining  
communications links, which were also ~~contained~~  
included in a local device DZ in the description for  
figure 5, have all been incorporated in one  
communications terminal KE. The number and selection of  
25 available components per terminal depends on the type  
of communications protocols used and on the  
communications media which are available.

Such an arrangement provides the option of connecting  
30 telephone subscribers to TDM subscribers using the  
Internet Protocol. In this case, the central control  
mechanism carries out call processing for the TDM  
subscribers. As regards the IP telephone subscribers,  
the functionality of their devices needs to be  
35 extended, for example, so that they can provide the  
scope of functions standardized on the basis of ITU  
protocols H.323 and H.450. This can advantageously be  
done by virtue of the equipment-specific alignment  
modules DH being equipped with the functions of the  
40 H.323 and H.450 protocols for the purposes of actuating

IP subscribers. This variant arrangement is particularly advantageous because telephony based on the Internet Protocol can easily be linked to TDM-based telephony. The development complexity for matching the central control device ZE100 to the communications terminals KE is minimal in this context and requires only the development of a specific software module DH.

The local switching centers for the communications terminals KE exist, by way of example, in the form of network driver cards for the Ethernet. A clear relationship between Internet addresses (IP addresses) and the connection features of a TDM connection can be produced by assigning an IP address precisely one local device having a subscriber line module and a subscriber line, for example, which device can in turn be reached via precisely one TDM data path. The local device, the subscriber line module, the subscriber line and the TDM data path are not physically present in this case, but rather are set up only fictitiously in the software. This makes it possible to continue to use normal control with no great complexity of change. The changes are then for the most part limited to configuration data.

Figure 7 shows a partial view of the illustration from figure 5 in order to explain an advantageous embodiment of a communications arrangement and a specific mode of operation of this arrangement. The reference symbols are used in a similar manner to in the other figures in this case. The fact that this illustration shows only two local devices DZ20 and DZ40 need not mean that such an embodiment of a communications arrangement can be limited to just two local devices. Instead, every local device in a communications arrangement can be equipped with the advantageous refinements which will be discussed below.

In contrast to the illustration in figure 5, this figure shows terminals KE50, KE60, KE70 and KE80. While

the terminals KE50 to KE70 are connected by means of communication lines 2050 to 2070 to the local device DZ20 and, there, to the subscriber line module SLMD20, the communications terminal KE80 is connected by means of a connecting line 3080 to the module SLMD40 in the local device DZ40. As already explained above, these modules SLMD20 and SLMD40 communicate with the appropriate local switching centers CS20 and CS40 via TDM connections 304 and 302. As has already been described in this context, transport-network-specific call processing is normally carried out for an arrangement as described. This normal case arises, by way of example, when the communications terminal KE80 wishes to communicate via its connecting line 3080, the TDM data link 304, the conversion device U40, the local switching center CS40 and via a transport network link 72040 with one of the communications terminals KE50 to KE70 via the local switching center CS20, the conversion device U20 and the TDM data link 302 and via the subscriber line module SLMD20.

In the case of this specific embodiment, however, it is necessary to prevent a situation where, if communications terminals connected to the same subscriber line module or to the same local device DZ20 communicate with one another via the conversion device U20, because such communications terminals can be connected directly via the TDM data stream by switching their respective timeslots, and converting the TDM data into a transport-network-specific format ties up conversion capacity unnecessarily. Hence, suitable processing when handling a connection between the communications terminals KE50 to KE70 is intended to prevent communications data which are to be interchanged from needing to be converted into a transport-network-specific format, and then back again, using the conversion device U20. For the call processing in such an arrangement, timeslot-related information about the communications subscribers involved is required. As complementary information,

information about the address of local devices to which these communications terminals are connected is additionally provided for specifically directed connection setup.

5

In an arrangement of the type illustrated in figure 7, the protocol-specific information analyzed is the address of the local device, and if the addresses of the local devices DZ involved and of the terminals to be connected are identical, i.e. terminals connected to the same local device DZ, conversion of the TDM data is prevented and a direct connection is produced between the terminals. This has the advantage that the conversion device, in this case U20, is available for other conversion procedures, that the transport network is not burdened by such procedures, no charges arise in the transport network and similarly the local switching center can perform other tasks. Hence, in this case, the handling of a connection involves the address of a local device for communications terminals KE affected thereby being checked in a respective local device DZ. Advantageously, if the result of this check is positive, a signal is output to an access chip for the TDM data stream, the task of which is to tap off the timeslots from the TDM data stream, or to pass them to the TDM data stream. Using this signal, this chip, for example, produces a short circuit such that the reading and writing directions of the communications terminals involved are interchanged with one another. This chip may possibly be in the form of a switching matrix.

The addresses can be checked both in the local device and in the central device. In the case of a central check, the local switching center is informed that a short circuit needs to be introduced.

35

199902871

Description

7/ptp

# Communications system

5 The invention relates to a method and an arrangement for setting up and clearing down, and sustaining, communications links, in particular within the context of a private branch exchange and terminals which are to be connected.

10

The rising volume of communication, as a result of an increasing number of communications subscribers and rising demands on the volume of data to be transmitted, places greater and greater demands on switching centers, in particular on private branch exchanges, with regard to the volume of data to be transmitted for each communications link and the number of communications terminals which are to be connected to one another.

20

Current devices are based, by way of example, on the TDM method (Time Division Multiplexing), in which communications data on different connections are transmitted in respectively defined timeslots. A connection between different communication parties is set up by a switching matrix which assigns incoming timeslots on an incoming connection outgoing timeslots to an outgoing connection on the basis of a control information item. Such switching matrices are generally of fixed proportions and can set up only a defined number of connections, which often makes it difficult to match exchanges to requirements. Another problem with such devices is that the timeslots are able to hold only a limited amount of data.

35

On account of different strengths and weaknesses of networks when transporting voice and data in the local domain, various communications networks have become established for specific purposes of use.



199902871

The object on which the invention is based is that of specifying another method and an arrangement for providing a communications link which ensure a high  
 5 level of flexibility in terms of matching to network infrastructures and in terms of the physical extent thereof. This object is achieved for the method on the basis of the features of patent claim 1 and for the arrangement on the basis of the features of patent  
 10 claim 8. Developments of the invention can be found in the dependent claims.

A particular advantage is that the inventive method allows the operation of a heterogeneous communications  
 15 network using a joint control mechanism, because information about the type of protocol which can be used to reach respective subscribers is held in the area of the central control mechanism, or in the transport network. Advantageously, the topology of the  
 20 transport network can differ from that of the control network in this context. This makes it possible to set up a communications link while avoiding numerous diverse conversion procedures which would be necessary on a previously stipulated path between the  
 25 subscribers. This advantageously takes account of the fact that the subscribers communicate using different communications protocols, with local matching to the required communications protocol, as opposed to central matching, allowing the communications path to be routed  
 30 via a minimal number of conversion devices, which protects the resources in the network and keeps down the length of the communications paths in the transport network.

35 A particular advantage is that one development of the method described provides not only the protocol information item but also a media information item relating to the transport network, because this makes it possible to take into account the characteristic of

different transmission media in terms of transport quality, utilization and speed when controlling the connection setup.

5 A particular advantage is that one development of the method described allows the different protocol structure of communications protocols handled on a single medium or on different media to be taken into account by actuating suitable protocol conversion  
10 units, associated with communications subscribers which are involved, in an appropriately defined manner when setting up and sustaining the connection.

A particular advantage is that one development of the  
15 method described allows a defined media access device to be actuated for a particular communications subscriber. If a plurality of transport media are available for each communications subscriber, this advantageously allows them to be specifically taken  
20 into account and actuated when a connection is set up.

A particular advantage is that one development of the method described allows the information required for controlling the transport network to be set up and/or  
25 provided centrally, because the problem of updating, maintaining and saving these data is then limited to the maintenance of a central database.

Advantageously, one development of the method described  
30 affords the opportunity for required control information to be provided locally in the transport network and for the control mechanism to request it when a connection is set up, because this allows local measures for aligning the transport network to be taken  
35 without such measures affecting the entire transport network and a central control mechanism.

Advantageously, in one development of the method described, in which the transport network provided is a

199902871  
network to which information is transmitted on the  
basis of the Internet Protocol, a local device is  
controlled by assigning to an IP address precisely one  
PCM data-stream subscriber line and an entire local  
5 device, because this allows IP subscribers to be  
managed and controlled using control mechanisms which  
likewise actuate TDM-based communications devices,  
without the additional need for a high level of  
development complexity in order to match these devices  
10 to IP-based terminals. This allows existing  
conventional telephone installations also to be used  
for IP telephony, for example, where conventional  
telephone installations provide a large quantity of  
service features, or else makes it possible to control  
15 data links to a telephone installation and thus to  
enhance them with service features.

A great advantage of one development of the method  
described is that the setup of a direct connection  
20 between communications terminals relieves the burden on  
transport-network-specific devices, such as the local  
switching centers and the conversion devices required  
for the otherwise necessary data conversion. This makes  
it possible to increase the performance of the  
25 transport network.

Particularly advantageously, an arrangement for setting  
up/clearing down and/or sustaining a communications  
link has means which output at least two control  
30 information items to two local devices in the transport  
network if at least one connection element between  
these local devices is affected, because this provides  
a configuration for controlling heterogeneous transport  
networks which involves transmitting connection  
35 information, which is suitable for controlling TDM  
links, together with the required protocol information  
item to the local devices affected by the connection  
setup/clear-down and/or sustenance. Particularly  
advantageously, one such arrangement likewise allows

199902871

operation of a mixed infrastructure comprising TDM-based switching centers and IP-based local area networks.

- 5 A particular advantage is that one development of such an arrangement has a central control device which provides transport-network-specific media information or protocol information and makes it available for connection setup. This ensures, in connection with an  
10 existing TDM-based communications infrastructure, that the available central database, possibly service feature implementation and application interface, can continue to be used and need be extended only by the protocol- and media-specific information for operating  
15 mixed infrastructures.

Compared with the central solution, local provision of the complementary control information required has the advantage that configuration changes affect only local  
20 areas of local devices and not the entire transport network, which means that a more flexible device is produced in which the respective current stock of control information is requested for connection setup before central control of the transport network only  
25 when a connection is being set up.

Advantageously, one development of the arrangement described has a gateway for converting a TDM protocol into the Internet Protocol, because such a gateway can  
30 connect TDM-based units to a transport network on which the Internet Protocol is handled.

Advantageously, one development of the arrangement described has a checking device for checking protocol-specific information for the address of a local device,  
35 because this makes it possible to ensure that there is no need for a procedure for converting the communication data into transport-network-specific communication data for communications links between

199902871

communications terminals associated with a single local device. Advantageously, there is therefore no delay as a result of conversion and no loss of data as a result of conversion methods which may not be loss free.

5

Advantageously, one development of the arrangement described has a mechanism which can produce a short circuit within a TDM data stream between two subscribers to be connected, because this allows  
10 internal communications links to be set up in a technically elegant fashion without using the local switching center and the conversion device.

Advantageously, an internal connection is set up, in  
15 one development of the arrangement described, by interchanging the reading and writing directions of timeslots in a TDM data stream, because this allows a communications link to be produced within a local device in a technically most simple manner.

20

Advantageously, one development of the arrangement described has an Ethernet access facility, because such a network access facility allows a terminal to access the Ethernet. Such network access cards are available  
25 on the market and are a simple and inexpensive solution for producing mixed transport networks with connection elements via the Ethernet.

Particularly advantageously, all the devices provided  
30 for heterogeneous network operation in local devices are incorporated in specific terminals, because such a terminal can be controlled by a TDM-based control mechanism, customary to date, with equipment-specific stipulation of a single TDM data stream in connection  
35 with a single subscriber line and a subscriber line module without any great complexity for aligning control mechanism customary to date.

One particular advantage is that one development of

such arrangements provides telephones and personal computers as terminals, because these are the terminals which are used most frequently and direct connection of these units to the Ethernet for voice communication represents great additional benefit for terminal users if they can be operated by a central control mechanism in conjunction with conventional devices.

Exemplary embodiments of the invention are explained in more detail below with reference to figures.

Figure 1 shows a conventional communications arrangement,  
 Figure 2 shows an example of a novel communications arrangement,  
 Figure 3 shows an example of a message flow in a known switching system,  
 Figure 4 shows an example of a message flow using timeslot-based connection information for the transport network,  
 Figure 5 shows a communications infrastructure in which different communications protocols are used on connection element links,  
 Figure 6 shows a communications infrastructure using IP-based terminals, and  
 Figure 7 shows another exemplary embodiment.

Figure 1 shows an example of a known private branch exchange 150 with two peripheral devices P1 and P2 to which a communications terminal KE1 and KE2 operating on a digital or analog basis is respectively connected. These peripheral devices P1 and P2 are accommodated in the same physical area as the central device ZE1. By way of example, they are in the same room or in the same cabinet as it. The terminals occupy defined timeslots in the PCM data stream (Pulse Code Modulation) with communication data. The digital or analog communications terminals KE1 and KE2 are respectively connected to subscriber line modules SLM01

199902871  
and SLMO2 which supply or take digital data, intended  
for the respective terminals or coming from the  
respective terminals, to/from the PCM data stream using  
timeslots stipulated by signaling. These PCM data  
5 streams are denoted by 100 and 200 in figure 1. In  
addition, signaling connections are shown which are  
represented by 110 and 210. It should be noted that  
these involve only a logical representation and not a  
physical representation. In reality, however, the  
10 transport data and the signaling data are transmitted  
in the same connecting cable.

This figure also shows peripheral devices P1 and P2 and  
supply modules LTUC1 and LTUC2 which regulate the data  
15 traffic to the subscriber line modules of the  
respective peripheral devices. The peripheral device P1  
is supplied with signaling data via the line 110, and  
the peripheral device P2 is supplied with signaling  
data via the signaling line 210.

20 As can clearly be seen here, this arrangement involves  
both the information to be transported and the  
signaling information being supplied to a central  
device ZE1. In this context, a messaging device DCL  
25 collects and distributes messages 2 which are  
interchanged between the central device ZE1 and the  
peripheral devices P1, P2. The call processing section  
CP controls the setup and clear-down of connections  
and, to this end, uses equipment-specific interface  
30 functions DH, inter alia, which are in the form of  
program modules, for example. This involves producing  
setting instructions 1 for the switching matrix MTS.  
These setting instructions essentially indicate  
which input of the switching matrix is to be connected to

199902871

which output in order to provide a communications link. Control and connection functions are thus performed by a single physically incorporated functional unit in the communications network.

5

Problems arise with such configurations because all the data to be transported need to be supplied to the central device ZE1. This is the case even if, by way of example, two communications terminals which are connected to the same peripheral device P1 need to communicate with one another. The wiring complexity required for such devices increases with increasing distance between the terminals and the central device ZE1, which means that this type of arrangement restricts the areal extent of a private branch exchange or makes installation much more expensive when covering relatively large areas.

In such devices, problems likewise arise with regard to modular extendibility both in terms of the number of connections and in terms of the volume of data to be transmitted. This type of embodiment does not allow different data rates for each individual communications link.

25

Alignment and/or transparent integration of different network infrastructures is likewise not possible.

Figure 2 shows an example of a flexible arrangement for setting up communications links. By way of example, this arrangement illustrates the structure of a private branch exchange 250.

Equivalent reference symbols in figure 2 denote the same elements of the device as in figure 1. Looking at figure 2, it is immediately noticeable that the transport of communication data is triggered by the message traffic of the control messages. To this end, a separate transport network 700 and a separate control



199902871

network 310/410 are provided in this case. This design of an exchange has the advantage that any already existing networks, such as public or private voice and data networks, can be used for the transport network. Only the control network needs to be routed to the central device ZE2 in this case. The use of conversion devices, such as gateways, advantageously makes it possible to operate and control any hybrid configurations.

10

The digital or analog communications terminals KE1 and KE2 are in this case shown such that they are respectively connected to subscriber line modules SLMO1 and SLMO2. Without limiting the invention, however, such an arrangement 250 can also involve and incorporate terminals which can be connected to the transport network 700 directly, with bypassing or without an SLMO. It is also possible to connect ATM terminals or else IP-based (Internet Protocol) terminals. One example of a possible hybrid configuration is shown in figure 5 and is explained in the associated part of the description. Directly connected terminals are shown in figure 6 and are described by the associated part of the description of the figures.

25

As will also be recognized, the local devices DZ1 and DZ2 each have local switching centers CS1 and CS2 which, by way of example, can be in the form of Ethernet or ATM access devices.

30

In the case of mixed transport networks, gateways and routers and also media of any type can be connected to one another as required. The illustration likewise shows that the switching matrix MTS0 is no longer used for connection tasks.

35

Instead, the transport network performs the connection tasks.

In the present arrangement, to this end, the control lines 410 and 310 are used to provide at least one

199902871  
 respective control information item just for the  
 respective local switching centers CS1 and CS2 for the  
 purposes of setting up the communications link, said  
 control information item being derived from a timeslot-  
 5 based control information item. The information is  
 interchanged using messages. In addition, the figure  
 shows that PCM data are converted into cell data  
 according to the standard of the transport network type  
 700, such as ATM cell data, on a data link 300 or 400.  
 10 In this context, it should be noted that the use of an  
 ATM network as transport network serves only as an  
 exemplary embodiment. Ethernet networks, other IP  
 connections or even TDM connections are likewise  
 suitable. The selection is dependent on the intended  
 15 purpose of use and extends to the whole range of  
 available networks and also optical media, both in the  
 narrowband range and in the broadband range.  
 If appropriate, various transport networks can be  
 provided; in that case, gateways secure the link  
 20 between the various network sections.

Preferably, the local switching centers CS1 and CS2  
 perform transport-network-dependent call processing,  
 although this is essentially limited to a basic call  
 25 functionality. Service features are implemented and  
 provided by the central control mechanism ZE2.  
 Connections between the different local devices are  
 controlled by the central device ZE2 using signaling  
 messages. The advantages of this arrangement are that  
 30 it has both narrowband capability and broadband  
 capability. It allows the integration of any network  
 types and topologies. In addition, the transport  
 network can be set up both on public networks and on  
 private networks, or else can comprise a mixture. It is  
 35 advantageously possible for local devices at a distance  
 without physical limitation to be associated with the  
 central device ZE2, so that powerful devices with a  
 large physical extent can also be provided by such a  
 private branch exchange. The retention of a joint

control mechanism means that it is possible to continue to use already existing software with minimal changes. One advantage of such a device 250 over a networked system comprising devices 150 is that the distributed  
 5 system is a single installation (which is why it is likewise possible to operate service features and applications which are implemented only on an installation-wide basis), because it presents itself as a single installation from an application point of  
 10 view. This removes the need for conversion of these methods in order to allow them to operate on a network.

Figure 3 shows, in simplified form, an example of a message flow for connection control in a conventional  
 15 communications system for setting up a connection between two peripheral devices to which the terminal of a subscriber A, TLNA, and the terminal of a subscriber B, TLNB, are connected. The time sequence for the messages, or control messages, is shown from top to  
 20 bottom. First, the subscriber A goes off-hook and generates the signaling information OFF HOOK. Next, the communication party required is dialed by entering selection information which is forwarded by an equipment-specific interface module DH to the call  
 25 processing section CP for the subscriber A.

The selection code analysis WABE for the selection information results in a message SEIZURE being forwarded to the call processing section CP for the  
 30 subscriber B. An equipment-specific interface module DH which is responsible at that point assigns the connection an explicit timeslot, for example ZS1, for a defined PCM data link, for example PD1, and generates the control message TSL\_ASSIGN for the subscriber line  
 35 module SLM01. This control message sends the subscriber line module SLM01 the explicit timeslot ZS1 and the stipulated PCM data link PD1 which are to be used for the connection. The explicit timeslot ZS1 for the PCM data link PD1 transports communication data on the

199902871  
 connection element between subscriber line module SLM01  
 and MTS. A second explicit timeslot ZS2 for a second  
 explicitly stipulated PCM data link PD2 is needed for  
 the connection element between MTS and subscriber line  
 5 module SLM02. The control information ZS2 and PD2 is  
 communicated to the subscriber line module SLM02, again  
 using a control message TSL ASSIGN.

For physically connecting individual subscribers, TDM-  
 10 based private branch exchanges use a TDM switching  
 matrix MTS. For this switching matrix, a setting  
 instruction PATH\_CONNECT1 is transmitted which causes  
 the timeslot ZS1 for PCM data link PD1 to be connected  
 to the timeslot ZS2 for the PCM data link PD2. This  
 15 means that the two connection elements are connected to  
 form a continuous link between SLM01 and SLM02.

To carry out the method, it does not matter whether CP  
 and DH are part of the control software and whether  
 20 they are in the form of individual modules or in  
 integrated form.

Figure 4 shows, in simplified form, an example of a  
 message flow between two local devices, for the  
 25 purposes of connection control. Connected to these  
 devices are the terminal of a subscriber A, TLNA, and  
 the terminal of a subscriber B, TLNB. The transport  
 network used in this case is, by way of example, an ATM  
 network. The time sequence for the messages is again  
 30 shown from top to bottom.

A functional unit STMA, as gateway, converts the  
 timeslots for the PCM data stream into a cell stream of  
 ATM cells. In the exemplary embodiment shown in figure  
 2, the conversion device is respectively incorporated  
 35 in the local switching center CS1 or CS2 and is  
 therefore not shown separately.

The message flow differs from the flow shown in figure  
 3 only after the point at which the setting instruction

199902871

PATH\_CONNECT1 is transmitted for the TDM switching matrix. Instead of a setting instruction PATH\_CONNECT1, this embodiment involves the generation of a control message PATH\_CONN2 which is sent to the local switching

5 centers. These then set up a connection in the transport network. When an ATM transport network is used, an ATMSVC is set up (ATM Switched Virtual Connection), for example using stipulated ATM signaling methods.

10 To this end, the control message PATH\_CONN2 needs to contain the timeslot information and data link information ZS and PD, which can be taken directly from the setting message PATH\_CONNECT1, for example. In addition, the central control device needs to indicate

15 just the transport-network-dependent address of the local switching center to which the connection is to be set up. That is to say that the data which need to be provided for the central control mechanism as information relating to the transport network are

20 limited to the transport-network-dependent addresses for the respective local switching centers. The central control device again ascertains the necessary addresses from the timeslot information and data link information ZS and PD. Association tables in a central database DB

25 control the mapping of timeslot/data link to local switching center.

This principle is also suitable for controlling heterogeneous transport networks. It may be necessary

30 additionally to store the network type and the available gateway at the same time.

The control message PATH\_CONN2 can also contain other information, and this can also be generated in a

35 plurality of more specific forms. If connections having different bandwidths need to be set up, it can contain

information about the required bandwidth. Alternatively, the bandwidth information can also be interchanged directly between subscriber line module and switching center.

5

When the local switching centers have set up a connection in the transport network 700 after receiving the PATH\_CONN2 message, said connection is used to transmit the user data. The user data stream on the data link 300/400 between subscriber line module and local device DZ is assigned to a connection between DZ1 and DZ2 by mapping timeslot indication ZS and PD for the connection identifier for the connection.

This means that, despite the possibly complicated flows when setting up a connection via the transport network, the central control mechanism ZE2 need forward only these addresses to the call processing section of the transport network in order to set up a connection there. The rest is handled by the transport-network-specific call processing section.

On the basis of this message flow, the PATH\_CONNECT instruction is thus replaced by transport-network-specific call processing. To be able to connect TDM-based subscribers independently of transport network using local switching centers, it is necessary to convert timeslots into transport units. This is done in a conversion unit, such as STMA, of which there is at least one, preferably looped into the path of the user data, for each local device. For this purpose, an ATM-PCM gateway, an IP-PCM gateway or another required gateway can be provided.

However, the method described is not limited to dialup connections which are set up dynamically, but can also be used for an ATMPVC (ATMPVC Permanent virtual connection). The information relating to the address may then need to be complemented by information which regulates the use of permanent connections. In

addition, other forms of data transmission can also be used, such as IP connections or FDDI (Fiber Distributed Data Interface), etc.

5 Figure 5 shows as an exemplary embodiment a communications arrangement in which local devices DZ are connected to one another by a heterogeneous transport network, the connections in this transport network being distinguished in that connection elements  
10 are produced using different communications media or by handling different communications protocols on these connection elements.

Like the arrangement shown and described in figure 2,  
15 this mixed communications system is also controlled by a central control device, with control messages being transmitted by the central control mechanism and being sent to the local switching centers CS in order to set up a connection and to sustain or clear down the  
20 connection. In this case too, message interchange is effected via a control network, although this control network is not shown to preserve the clarity of the illustration. The reference symbols in the figure can be interpreted in the same way as the reference symbols  
25 in the description of the other figures. Unless explicitly mentioned otherwise, functional elements with the same name in the figure also have the same scope of functions in this case.

30 Specifically, the figure shows local devices DZ10 to DZ40 which have subscriber line modules for communications terminals SLMD10 to SLMD40 (not shown). In addition, conversion devices U are provided in the respective local devices DZ, which carry out media  
35 alignment or protocol alignment among the different connection element links.

In addition, local switching centers CS10 to CS40 are shown. The conversion devices and the subscriber line

199902871

modules SLMD have TDM data links 301 to 304 between them. Specifically, the local devices DZ have the connection element links 71030, 72030, 72040 and 73020 between them. The connections 72040 and 73020 are, by way of example, transport network connection elements based on an ATM network. On the connections 72030 and 71030 shown, the communications protocol used is the Internet Protocol.

- 10 The Internet Protocol IP can be used both on an ATM connection and on an Ethernet connection. On the basis of the ISO/OSI (Open Systems Interconnect) protocol standard, the upper layers of a communications protocol can be used on different media. Specifically, this standardized protocol comprises seven layers, with the bottommost layer being the physical layer, the second layer being the data link layer, the third layer being the network layer, the fourth layer being the transport layer, the fifth layer being the session layer, the sixth layer being the presentation layer and the seventh layer being the application layer. In the case of this layer protocol standardized on the basis of ISO IS8802, each layer uses the services of the layer below it. Messages, for example in the form of control messages, which are transmitted using this layer protocol thus progressively receive an additional information item per layer, which produces a data structure in which the original messages have seven layer-specific information elements added to them.
- 30 Within the context of this communications protocol, any communications media and any layers can thus be coupled to one another.

The conversion devices U are necessary in order to match the different layer structures to one another. By way of example, the conversion device U20 converts ATM cell data into TDM data. These ATM cell data can then be forwarded directly as ATM cell data, for example in the local device DZ20 via the local switching center



CS20 and via the connection element link 73020.

However, it is likewise possible to forward them to a conversion device U2030 which is in the form of an ATM/IP gateway, for example. There, ATM cell data are conditioned for the Internet Protocol and can then be forwarded via the connection elements 72030 to the local switching center CS30 for the local device DZ 30. The remarkable aspect of this configuration is thus that terminals on the local device DZ20 can communicate with terminals on the local device DZ30 using the Internet Protocol and can also be reached directly on the basis of the asynchronous transfer mode.

To be able to actuate the different connection element links 72030 and 73020, a central control device thus requires appropriate complementary control information for control messages for controlling connection setup between communications subscribers, said control information relating to the type of connection path and protocol-specific information, i.e. gateways to be used.

The conversion device U2030 in the local device DZ30 is in the form of an ATM/IP gateway, for example. The local switching center CS30 is, by way of example, an IP router or switch, while U30 is in the form of an TDM/IP gateway. Similarly, the local switching center CS10 for the local device DZ10 is in the form of an IP router/switch, while the conversion device U1030 is in the form of a TDM/IP gateway.

The local device DZ40 likewise contains a local switching center CS40 in the form of an ATM switching section connected to a conversion device U40 which converts TDM data into ATM cell data.

199902871

Additional

information for the control mechanism about the reachability of the individual subscribers using particular gateways and about particular conversion  
 5 devices and switching centers, and also the associated local devices thereof, is stored in a central control device's data store, for example.

This centrally stored information can either be  
 10 distributed to the local units and can thus be the basis for a separate decision by the local units about communications protocols to be used and usable transport media when a connection is set up, or the decision is made in the central station and is  
 15 communicated to the local device.

On the basis of the control information in this database, an appropriate number of control messages are produced for one or more respective connection  
 20 elements, such as from DZ40 to DZ10, via the connection elements 72040 and 71030, said control messages being transmitted to the respective local switching centers in order to control connection setup, for example.

25 The connection variants shown here naturally represent only some of the technically possible variants of connection element links, communications media, communications protocols and conversion devices to which the invention can be applied without restriction,  
 30 which cannot all be listed.

By way of example, it is likewise possible for local data stores to be provided in the area of local devices DZ, the stock of information in said data stores being  
 35 limited only to devices which are present in the respective local devices DZ. For the case of connection control, although the central control mechanism then needs to request this information first, such configurations have the advantage that local devices

199902871

can also be serviced and maintained locally. There is also redundancy in the data storage and better availability of the communications devices, because the failure of a local data store does not affect the entire network.

By way of example, it is likewise possible for the area of local devices DZ to receive data from the central station whose stock of information is limited to the partner devices of local devices.

For the case of connection control, the local device can then make an independent decision about the use of the correct gateways.

A particular advantage of a communications arrangement as shown is that any infrastructures can be matched to one another, and that the specifically directed controllability of the connection element links and of the conversion devices required allows resource-saving connection setup in which unnecessary conversion steps for protocol or media alignment can be avoided in the best way.

Similarly, transport networks of any heterogeneity can be controlled by any central control device without complex technical developments in terms of alignment, because transport-network-specific call processing can advantageously be used which is based on information produced by a TDM-based control mechanism.

The specific way in which this can be done has already been described in the explanation of figure 4. The data storage required in such an arrangement can be limited to a minimum degree, because only the transport-network-specific data additionally need to be stored. Similarly, such a communications device brings the advantages of a single private branch exchange to bear, such as the central availability of service features, the central administrability and a central application

interface. Advantageously, a plurality of different, possibly already existing, network sections thus produce a standard communications system which has the outward appearance of a single installation but which  
 5 can be flexibly matched to the technical requirements of the customer by virtue of the choice of conversion devices.

Figure 6 shows a particularly advantageous  
 10 communications arrangement with communications terminals KE10 to KE40 which are connected via an Ethernet and are controlled from a central device ZE 100 via a control network STN. In this case, the connection can be set up both via an Ethernet and via  
 15 an ATM network, and/or using a hybrid configuration of the transport network. In this embodiment of an arrangement, the devices required for producing, for setting up, for clearing down and for sustaining communications links, which were also contained in a  
 20 local device DZ in the description for figure 5, have all been incorporated in one communications terminal KE. The number and selection of available components per terminal depends on the type of communications protocols used and on the communications media which  
 25 are available.

Such an arrangement provides the option of connecting telephone subscribers to TDM subscribers using the Internet Protocol. In this case, the central control  
 30 mechanism carries out call processing for the TDM subscribers. As regards the IP telephone subscribers, the functionality of their devices needs to be extended, for example, so that they can provide the scope of functions standardized on the basis of ITU  
 35 protocols H.323 and H.450. This can advantageously be done by virtue of the equipment-specific alignment modules DH being equipped with the functions of the H.323 and H.450 protocols for the purposes of actuating IP subscribers. This variant arrangement is

particularly advantageous because telephony based on the Internet Protocol can easily be linked to TDM-based telephony. The development complexity for matching the central control device ZE100 to the communications terminals KE is minimal in this context and requires only the development of a specific software module DH.

The local switching centers for the communications terminals KE exist, by way of example, in the form of network driver cards for the Ethernet. A clear relationship between Internet addresses (IP addresses) and the connection features of a TDM connection can be produced by assigning an IP address precisely one local device having a subscriber line module and a subscriber line, for example, which device can in turn be reached via precisely one TDM data path. The local device, the subscriber line module, the subscriber line and the TDM data path are not physically present in this case, but rather are set up only fictitiously in the software. This makes it possible to continue to use normal control with no great complexity of change. The changes are then for the most part limited to configuration data.

Figure 7 shows a partial view of the illustration from figure 5 in order to explain an advantageous embodiment of a communications arrangement and a specific mode of operation of this arrangement. The reference symbols are used in a similar manner to in the other figures in this case. The fact that this illustration shows only two local devices DZ20 and DZ40 need not mean that such an embodiment of a communications arrangement can be limited to just two local devices. Instead, every local device in a communications arrangement can be equipped with the advantageous refinements which will be discussed below.

In contrast to the illustration in figure 5, this figure shows terminals KE50, KE60, KE70 and KE80. While

199902871

the terminals KE50 to KE70 are connected by means of communication lines 2050 to 2070 to the local device DZ20 and, there, to the subscriber line module SLMD20, the communications terminal KE80 is connected by means

5 of a connecting line 3080 to the module SLMD40 in the local device DZ40. As already explained above, these modules SLMD20 and SLMD40 communicate with the appropriate local switching centers CS20 and CS40 via TDM connections 304 and 302. As has already been

10 described in this context, transport-network-specific call processing is normally carried out for an arrangement as described. This normal case arises, by way of example, when the communications terminal KE80 wishes to communicate via its connecting line 3080, the

15 TDM data link 304, the conversion device U40, the local switching center CS40 and via a transport network link 72040 with one of the communications terminals KE50 to KE70 via the local switching center CS20, the conversion device U20 and the TDM data link 302 and via

20 the subscriber line module SLMD20.

In the case of this specific embodiment, however, it is necessary to prevent a situation where, if communications terminals connected to the same

25 subscriber line module or to the same local device DZ20 communicate with one another via the conversion device U20, because such communications terminals can be connected directly via the TDM data stream by switching their respective timeslots, and converting the TDM data

30 into a transport-network-specific format ties up conversion capacity unnecessarily. Hence, suitable processing when handling a connection between the communications terminals KE50 to KE70 is intended to prevent communications data which are to be

35 interchanged from needing to be converted into a transport-network-specific format, and then back again, using the conversion device U20. For the call processing in such an arrangement, timeslot-related information about the communications subscribers

involved is required. As complementary information, information about the address of local devices to which these communications terminals are connected is additionally provided for specifically directed  
5 connection setup.

In an arrangement of the type illustrated in figure 7, the protocol-specific information analyzed is the address of the local device, and if the addresses of  
10 the local devices DZ involved and of the terminals to be connected are identical, i.e. terminals connected to the same local device DZ, conversion of the TDM data is prevented and a direct connection is produced between the terminals. This has the advantage that the  
15 conversion device, in this case U20, is available for other conversion procedures, that the transport network is not burdened by such procedures, no charges arise in the transport network and similarly the local switching center can perform other tasks. Hence, in this case,  
20 the handling of a connection involves the address of a local device for communications terminals KE affected thereby being checked in a respective local device DZ. Advantageously, if the result of this check is positive, a signal is output to an access chip for the  
25 TDM data stream, the task of which is to tap off the timeslots from the TDM data stream, or to pass them to the TDM data stream. Using this signal, this chip, for example, produces a short circuit such that the reading and writing directions of the communications terminals  
30 involved are interchanged with one another. This chip may possibly be in the form of a switching matrix.

The addresses can be checked both in the local device and in the central device. In the case of a central  
35 check, the local switching center is informed that a short circuit needs to be introduced.

199902871

Patent Claims

1. A method for setting up and/or clearing down and sustaining a communications link, in which

- a communications link between at least two local devices (DZ10-DZ40) is provided in a transport network (71030, 72030, 72040, 73020) by local switching centers (CS10-CS40) associated with the local devices (DZ10-DZ40),
- the setup and/or clear-down of the communications link is controlled by a central control device via a control network (310, 410, STN),
- the connection setup and/or clear-down in the transport network is controlled using at least two control information items,
- a connection information item suitable for defining a timeslot connection via a switching matrix represents a first control information item,
- a protocol information item represents a second control information item and is provided for the central control device and/or for the local devices (DZ10-DZ40) for the purposes of selecting communications protocols to be used and usable transport media.

2. The method as claimed in claim 1,

in which the control information item is complemented by a media information item which relates to the transport network and identifies at least one transport network medium for the communications link.

3. The method as claimed in one of the preceding claims,

for a communications link comprising at least two connection elements (73020, 72030) in the transport network, where each connection element



1

uses at least one respective communications protocol whose layer structure differs in at least one layer and in which the control information item is complemented by an information item which identifies a conversion apparatus (U20, U2030, U30, 3020) for the various communications protocols.

4. The method as claimed in one of the preceding claims, for a communications link comprising at least two connection elements in the transport network, where each connection element uses at least one respective communications protocol whose layer structure differs in at least one layer and in which the control information item is complemented by an information item which identifies a media access device (CS10, Cs30) for a respective communication medium.

5. The method as claimed in one of the preceding claims, in which an information item is provided centrally for the purposes of complementing the control information item in the area of the central control device (ZE1, ZE2, ZE100).

6. The method as claimed in one of claims 4 to 6, in which an information item is provided locally for the purposes of complementing the control information item and is ascertained at least once by the central control device (ZE1, ZE2, ZE100) in the course of the handling of a communications link (71030, 72030, 73020, 72040).

7. The method as claimed in one of claims 3 to 5, in which connection elements between local devices (DZ10,...,DZ40) in the transport network use the Internet Protocol for transmission, and in which connection control is effected by assigning to an IP address precisely one PCM data-stream subscriber line (KE) and a local device (DZ).

8. The method as claimed in one of the preceding claims, in which control information is used to check whether connection setup via the transport network (72040) is

necessary, and if not, the connection  
is provided elsewhere.

9. The method as claimed in claim 8,

in which the control information item used is at least one address for a local device (DZ), and if the communications link relates to communications terminals (KE) which are connected to the same local device (DZ), a connection is set up without the communications data being converted on a transport-network-specific basis.

10. An arrangement for setting up and/or clearing down, and sustaining, a communications link,

a) which has a transport network (71030, 72030, 72040, 73020) for providing a communications link,

b) which has a control network (310, 410, STN) for controlling the setup and/or clear-down of the communications link and which has first means for controlling the connection setup and/or clear-down in the transport network via the control network, these means being arranged with a physical separation from the transport network, which output at least two control information items,

and in which the transport network has at least two local devices (DZ10, DZ20..., DZ40) for outputting and receiving communications data, and in the area of the local device has a switching center (CS) for providing a communications link in the transport network, where at least one connection element (71030, 72030) of the communications link is in the form of a connection which uses the Internet Protocol as communications protocol.

11. The arrangement as claimed in claim 10,

in which the control network (310, 410, STN) has a central device (ZE) for control purposes and is operatively connected to second means at least for the purposes of providing transport-network-

specific protocol information and/or transport network media information.


12. The arrangement as claimed in claim 11,  
in which the second means are arranged centrally in the area of the first means.
13. The arrangement as claimed in claim 11,  
in which the second means are arranged locally in the area of the local device (DZ).
14. The arrangement as claimed in one of claims 10 to 13,  
in which a local device (DZ) has at least one conversion device (U1030, U30) in the form of a gateway for converting a TDM protocol into an IP protocol.
15. The arrangement as claimed in one of claims 10 to 14,  
in which the local device has at least one network access device to an Ethernet, in the form of a transceiver.
16. The arrangement as claimed in one of claims 10 to 14,  
in which a local device (DZ) has at least first means for address evaluation of addresses for local devices (DZ) which output a first signal when a communications link (2050, 2060, 2070) relates only to a single central device (DZ).
17. The arrangement as claimed in claim 16,  
in which the first signal is output to a device for accessing timeslots in the TDM data stream (302) from the local device, and the latter shorts the connection in the TDM data stream (302) in response to the reception of the signal.
18. The arrangement as claimed in claim 17,  
in which the connection is shorted by interchanging the reading and writing directions.
19. The arrangement as claimed in one of claims 10 to 15,

in which the local device is in the form of an integrated communications terminal (KE10..., KE40).

20. The arrangement as claimed in claim 19,  
in which the integrated communications terminal is in  
the form of a telephone (KE30).

21. The arrangement as claimed in claim 19,  
in which the communications terminal is in the form of  
a personal computer (KE10, KE20, KE40).



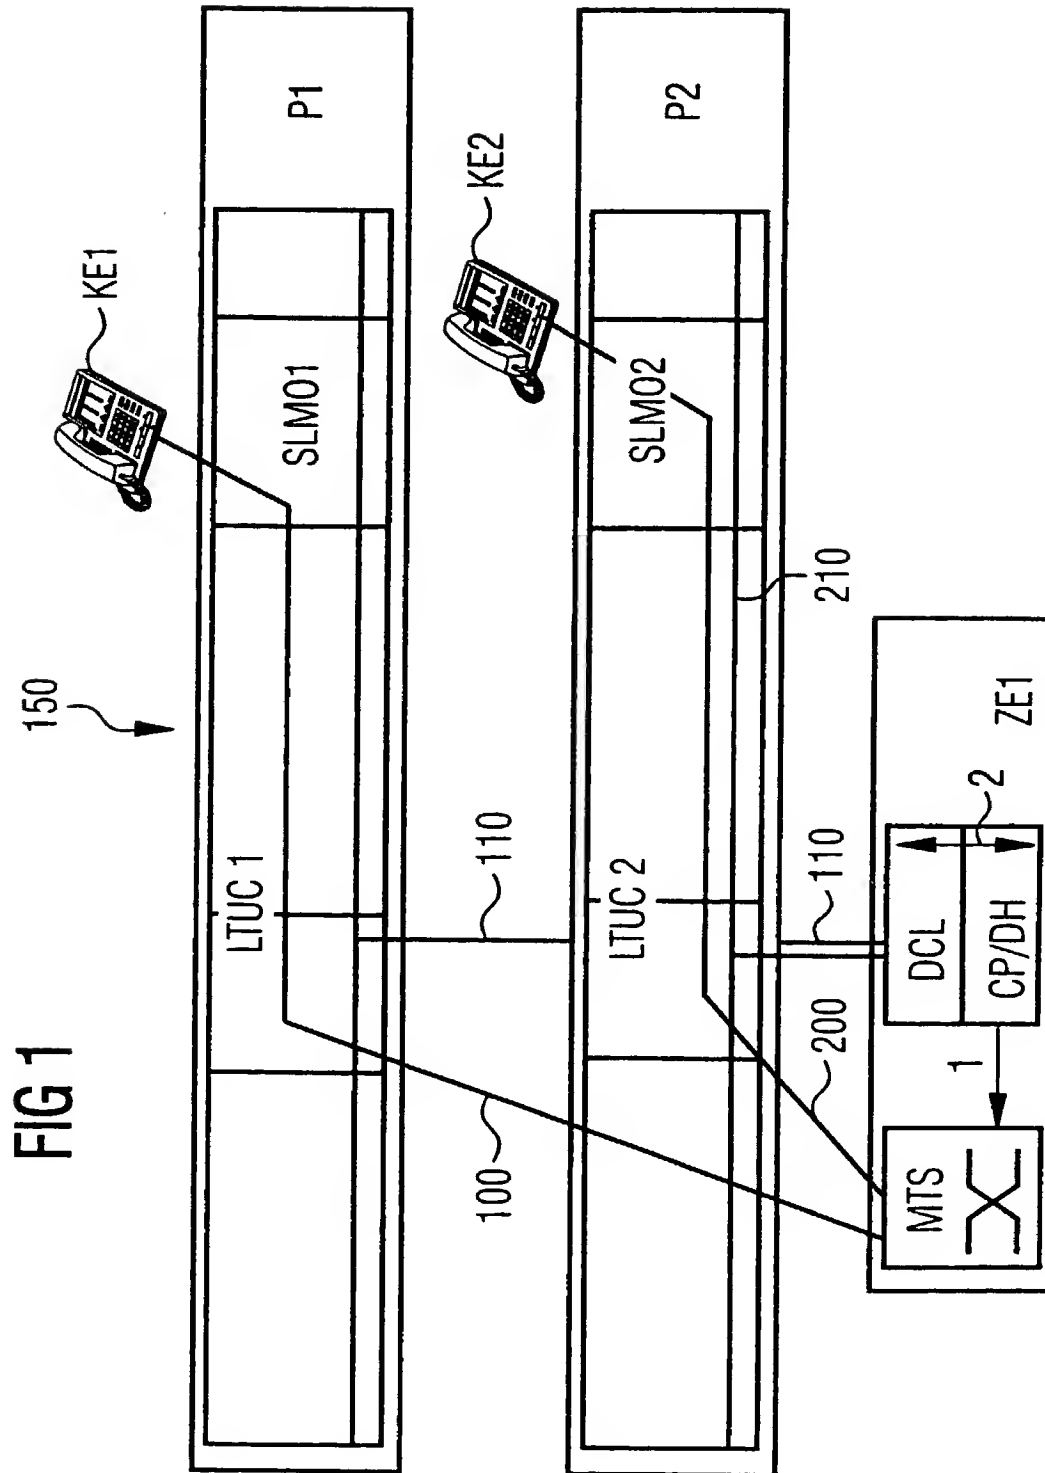

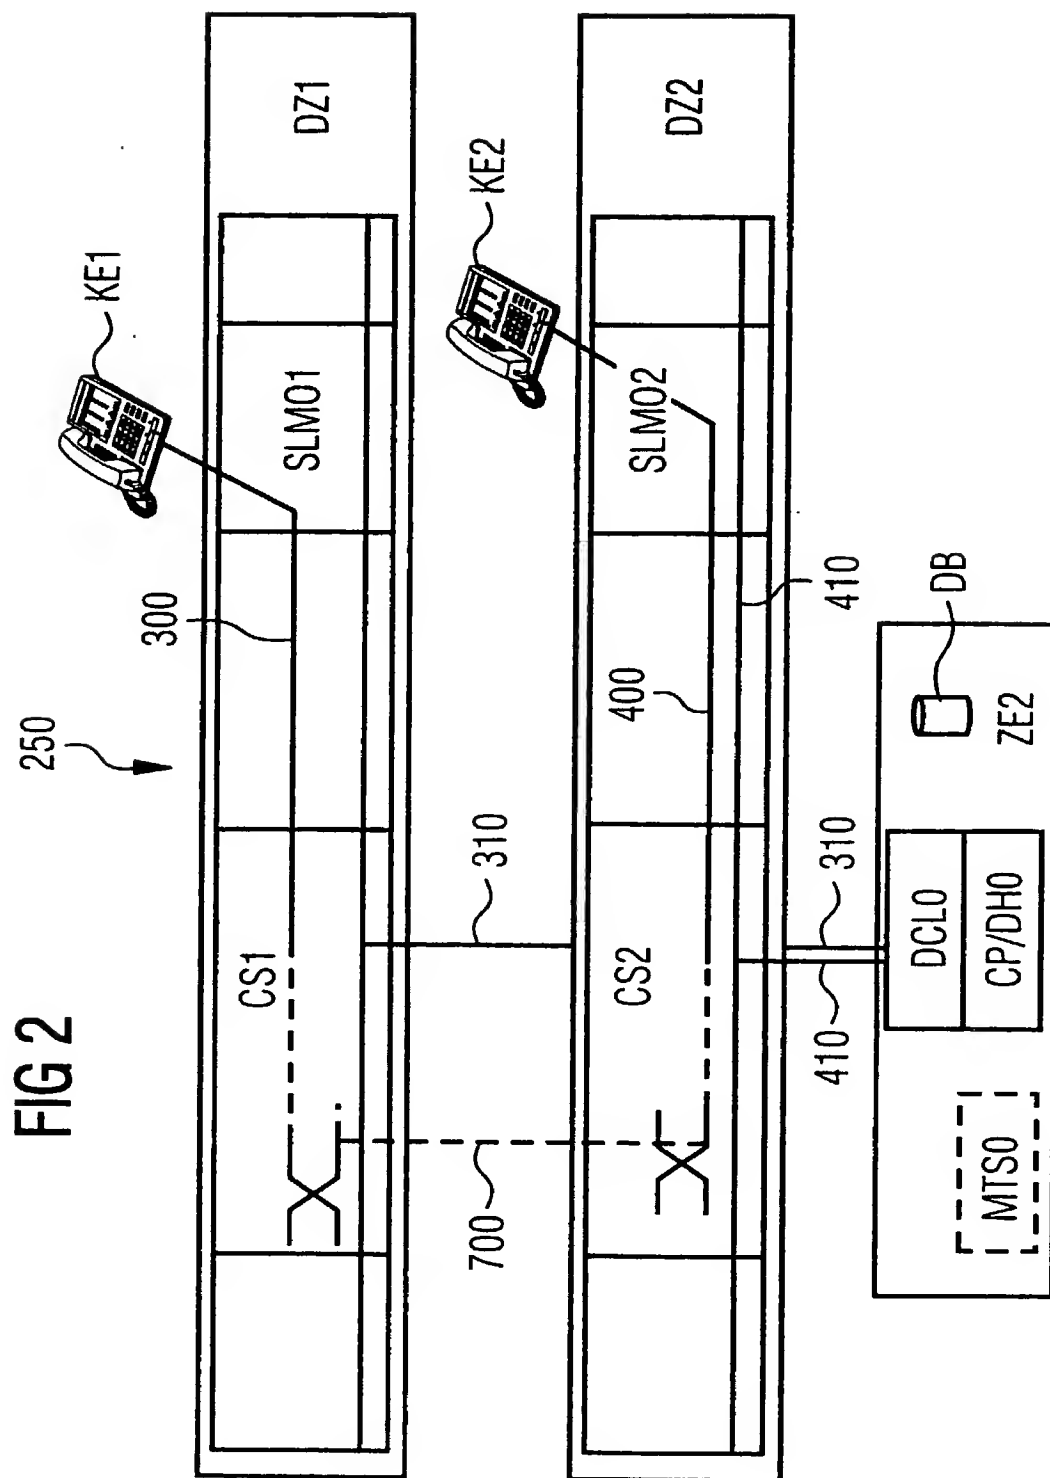


FIG 3

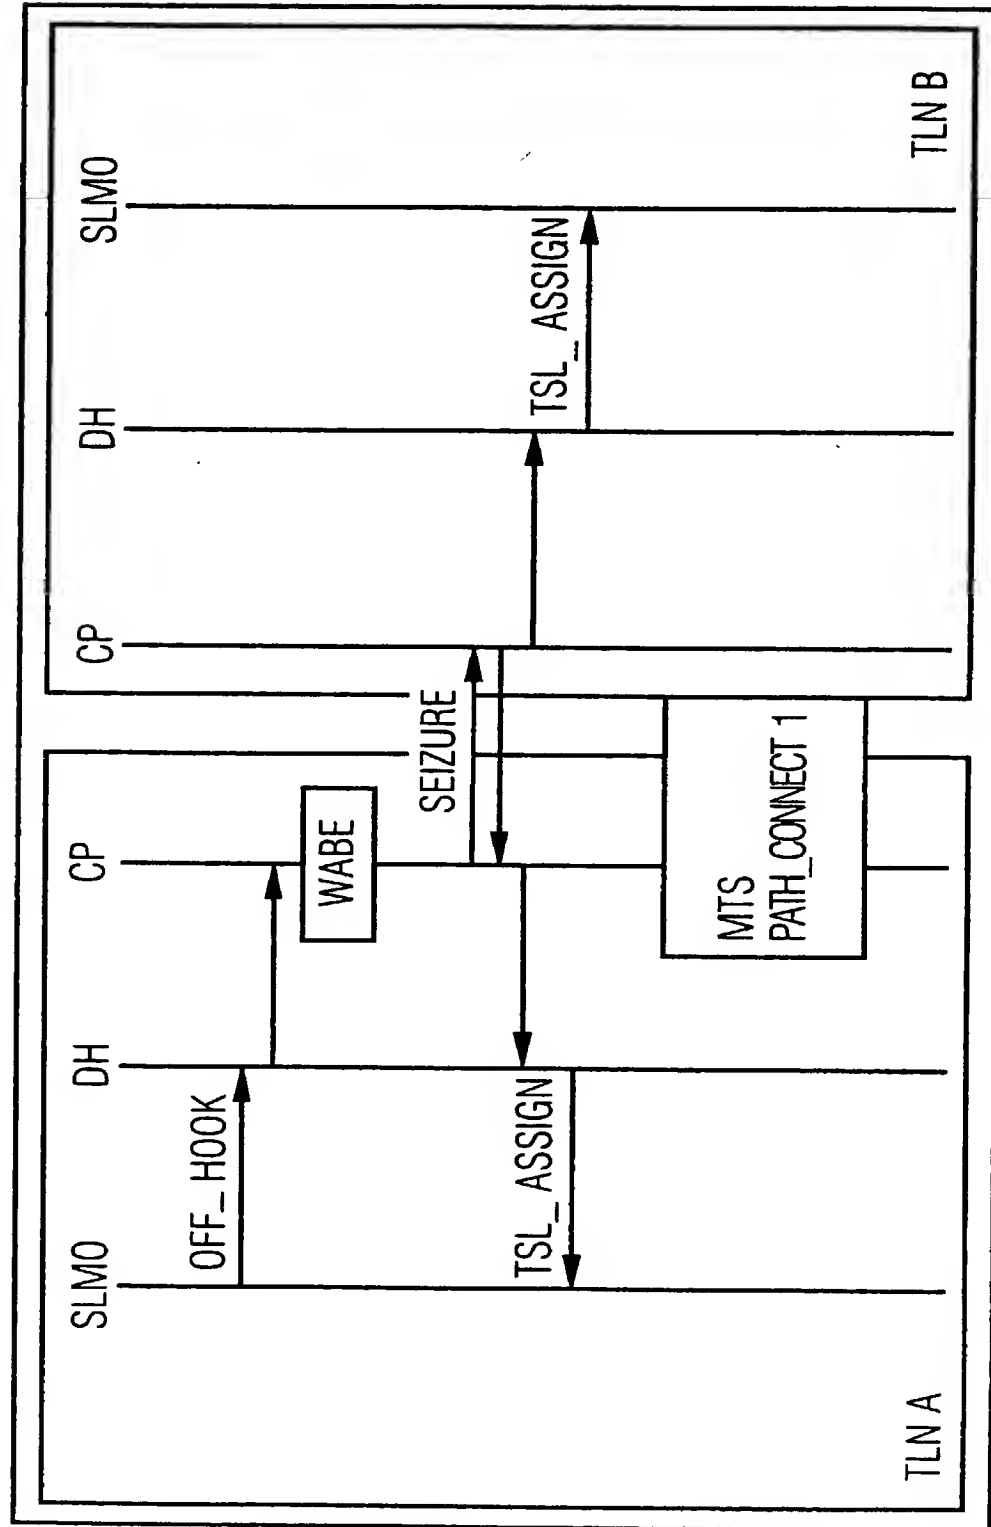




FIG 4

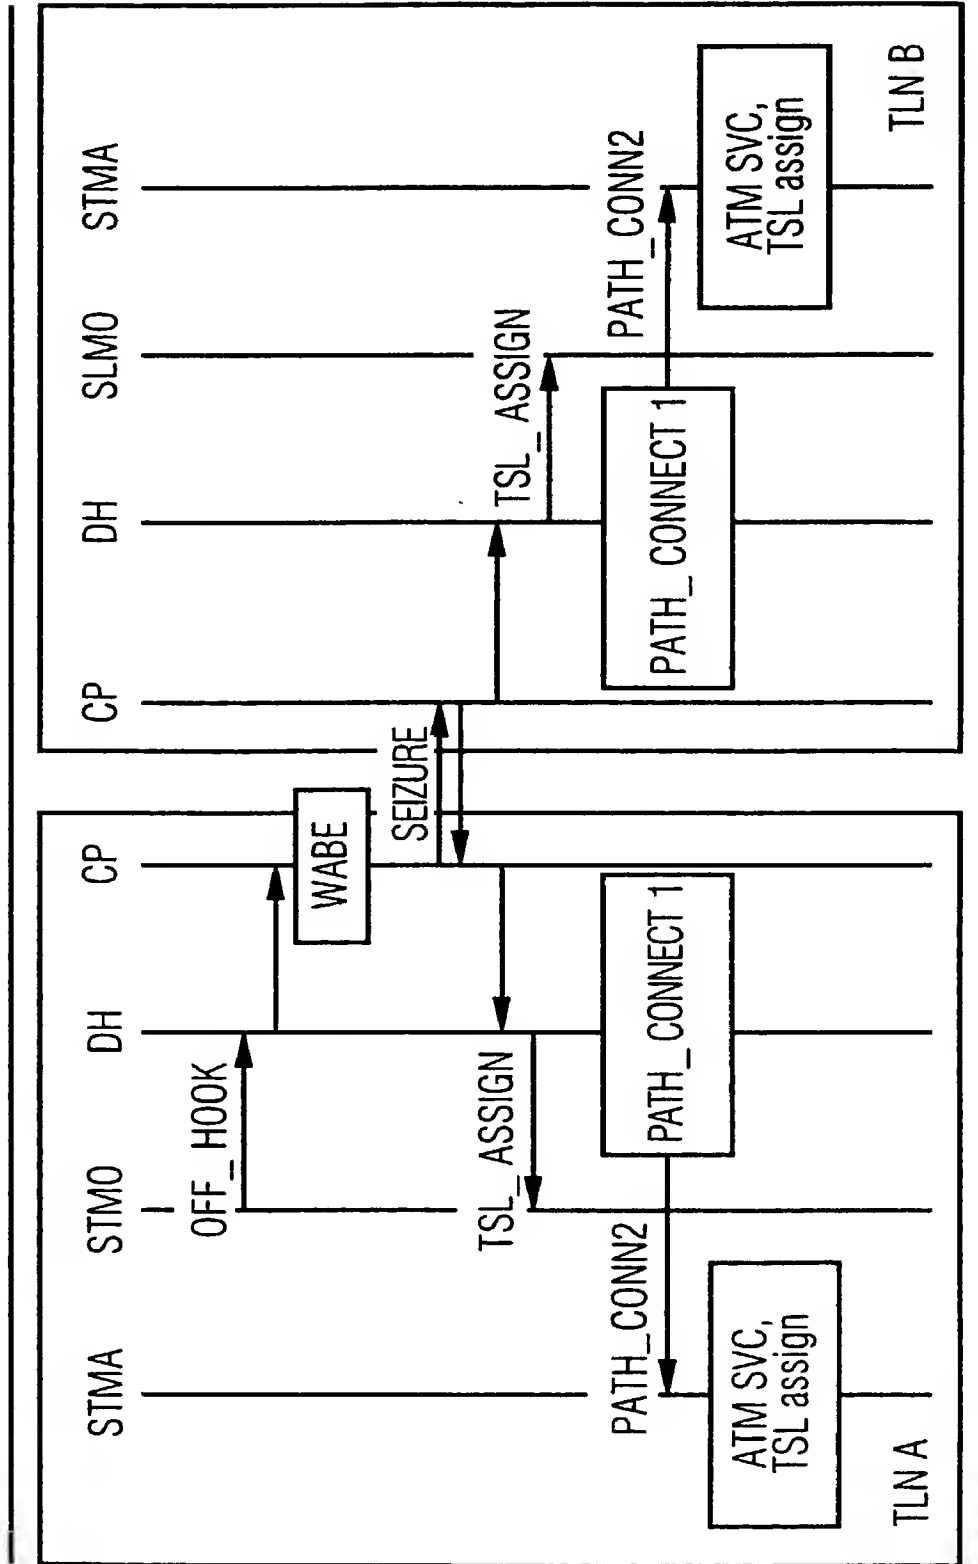


FIG 5



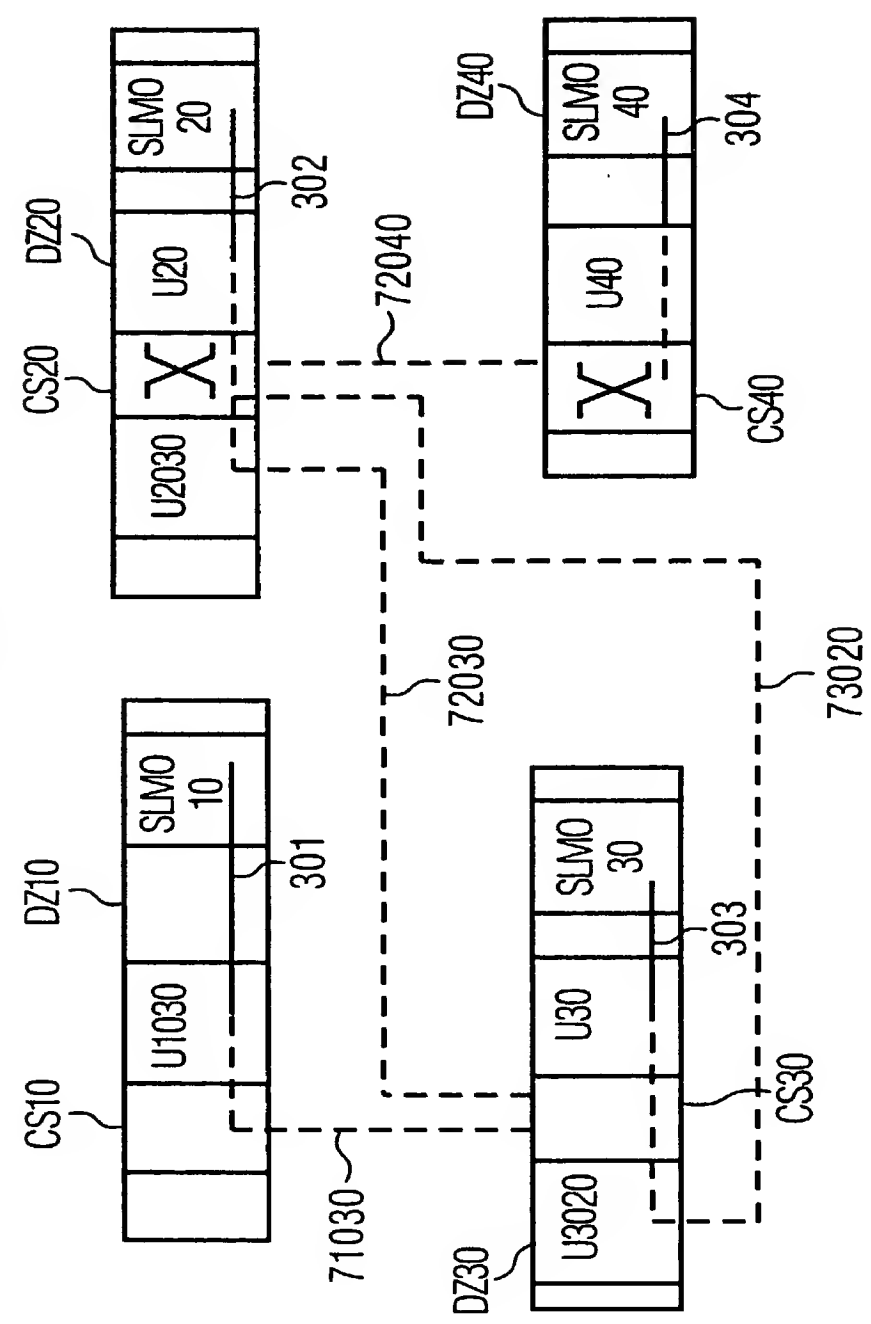


FIG 6

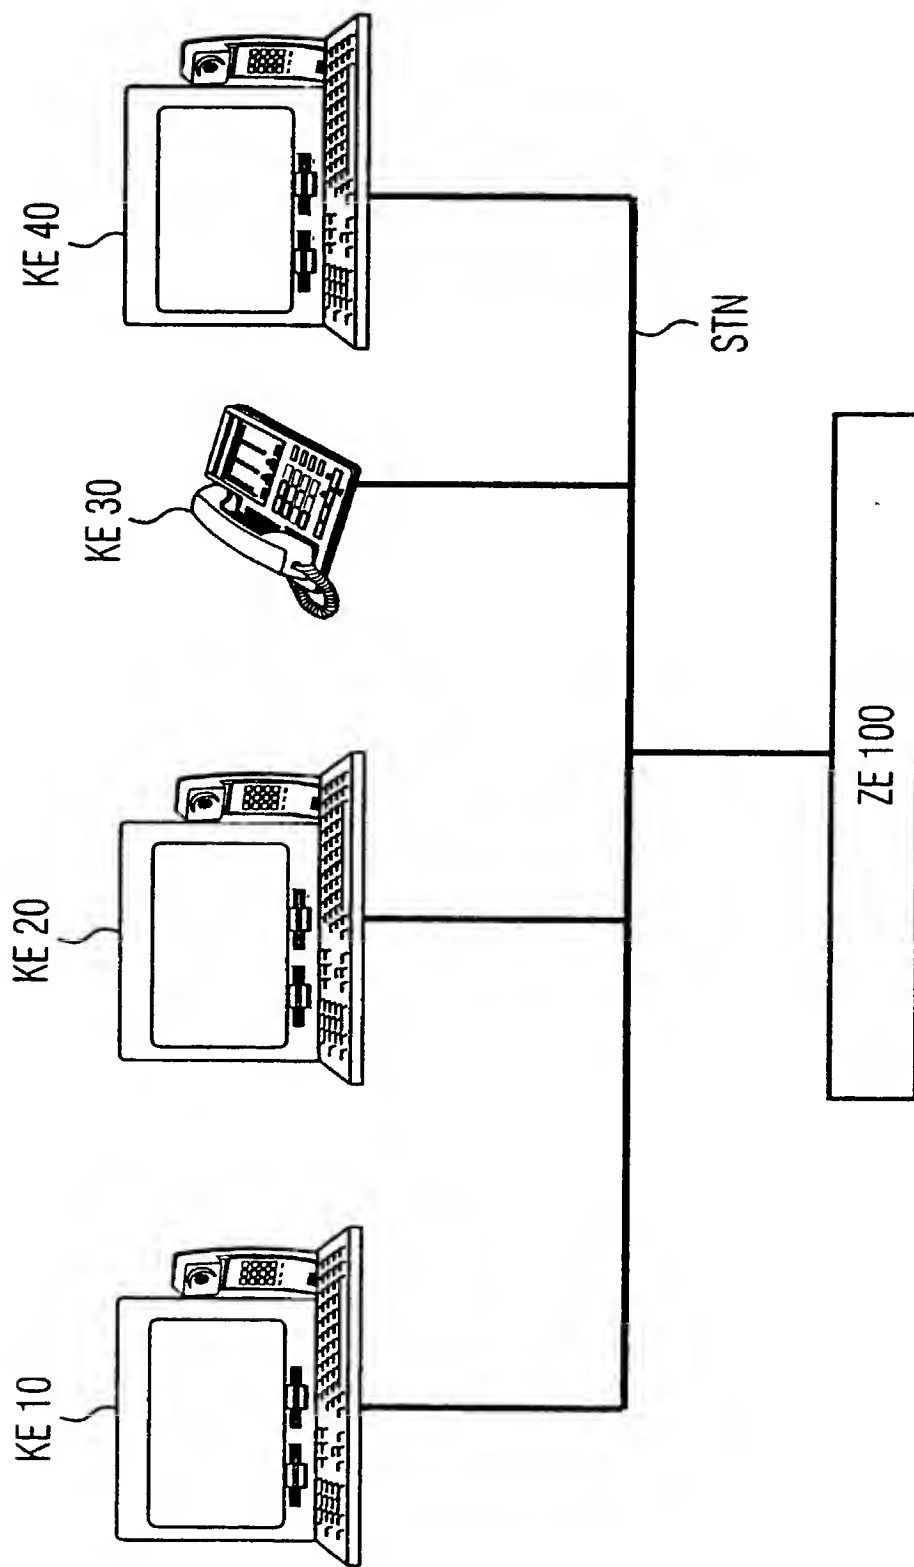

7/7

FIG 7

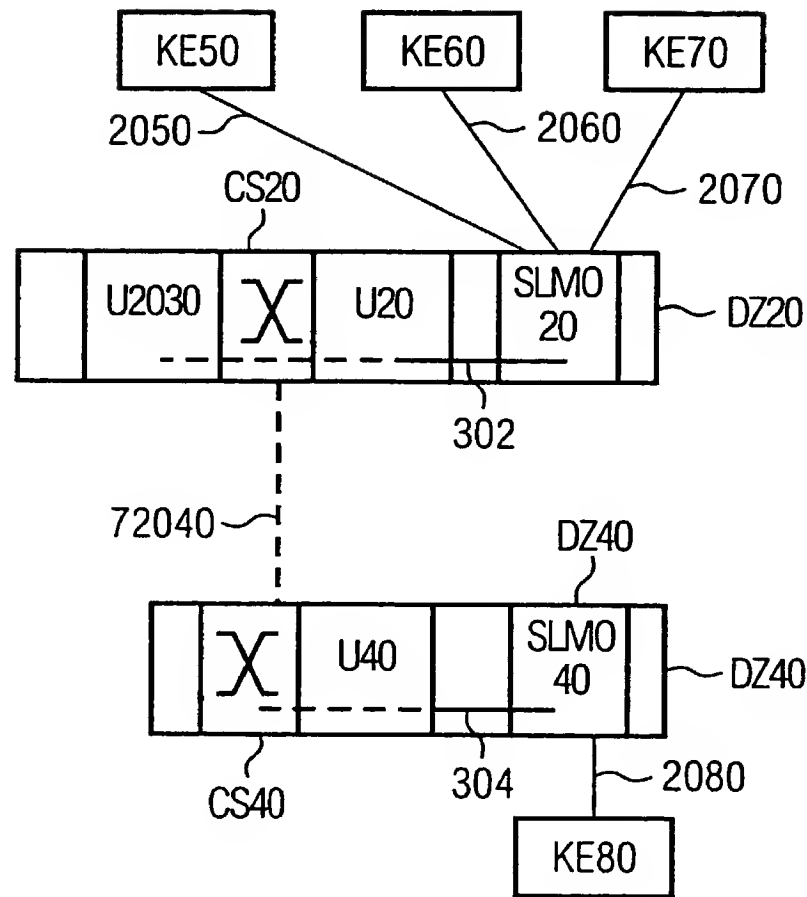

# Declaration and Power of Attorney For Patent Application

## Erklärung Für Patentanmeldungen Mit Vollmacht

### German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt.

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel

#### Kommunikationssystem

deren Beschreibung

(zutreffendes ankreuzen)

☐ hier beigelegt ist

☒ am 14.09.2000 als

PCT internationale Anmeldung

PCT Anwendungsnummer PCT/DE00/03207

eingereicht wurde und am 26.02.2002

abgeändert wurde (falls tatsächlich abgeändert)

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1 56(a) von Wichtigkeit sind, an.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird

As a below named inventor, I hereby declare that.

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

#### Communication system

the specification of which

(check one)

☐ is attached hereto.

☒ was filed on 14.09.2000 as

PCT international application

PCT Application No PCT/DE00/03207

and was amended on 26.02.2002

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed

## German Language Declaration

Prior foreign applications  
Priorität beansprucht

Priority Claimed

19945154.0

DE

21.09.1999

☒

☐

(Number)  
(Nummer)

(Country)  
(Land)

(Day Month Year Filed)  
(Tag Monat Jahr eingereicht)

Yes  
Ja

No  
Nein

(Number)  
(Nummer)

(Country)  
(Land)

(Day Month Year Filed)  
(Tag Monat Jahr eingereicht)

☐  
Yes  
Ja

☐  
No  
Nein

(Number)  
(Nummer)

(Country)  
(Land)

(Day Month Year Filed)  
(Tag Monat Jahr eingereicht)

☐  
Yes  
Ja

☐  
No  
Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1 56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1 56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application

PCT/DE00/03207  
(Application Serial No.)  
(Anmeldeseriennummer)

14.09.2000  
(Filing Date D, M, Y)  
(Anmeldedatum T, M, J)

anhängig  
(Status)  
(patentiert, anhängig,  
aufgegeben)

pending  
(Status)  
(patented, pending,  
abandoned)

(Application Serial No.)  
(Anmeldeseriennummer)

(Filing Date D, M, Y)  
(Anmeldedatum T, M, J)

(Status)  
(patentiert, anhängig,  
aufgeben)

(Status)  
(patented, pending,  
abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden können, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt (Name und Registrationsnummer anführen)

POWER OF ATTORNEY. As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Customer No 25227

And I hereby appoint

Telefongesprache bitte richten an:  
(Name und Telefonnummer)





Direct Telephone Calls to: (name and telephone number)

Ext \_\_\_\_\_

Postanschrift

Send Correspondence to.

Morrison and Foerster LLP  
2000 Pennsylvania Ave., NW 20006-1888 Washington, DC  
Telephone: (001) 202 887 1500 and Facsimile (001) 202 887 0763  
or  
Customer No. 25227

|   |   |
|---|---|
| <p>Voller Name des einzigen oder ursprünglichen Erfinders.<br/><b>Antonius Emmerink</b> 1-00</p> <p>Unterschrift des Erfinders  Datum <b>8.3.2002</b></p> <p>Wohnsitz<br/><b>Muenchen, DEUTSCHLAND</b></p> <p>Staatsangehörigkeit<br/><b>NL</b></p> <p>Postanschrift<br/><b>Ayingerstrasse 4</b><br/><b>81671 Muenchen</b></p> | <p>Full name of sole or first inventor<br/><b>Antonius Emmerink</b></p> <p>Inventor's signature  Date</p> <p>Residence<br/><b>Muenchen, GERMANY DEX</b></p> <p>Citizenship<br/><b>NL</b></p> <p>Post Office Address<br/><b>Ayingerstrasse 4</b><br/><b>81671 Muenchen</b></p>            |
| <p>Voller Name des zweiten Miterfinders (falls zutreffend):<br/><b>Egon Klein</b> 2-00</p> <p>Unterschrift des Erfinders  Datum <b>5.3.2002</b></p> <p>Wohnsitz<br/><b>Germering, DEUTSCHLAND</b></p> <p>Staatsangehörigkeit<br/><b>DE</b></p> <p>Postanschrift<br/><b>Muenchener Str. 14</b><br/><b>82110 Germering</b></p>   | <p>Full name of second joint inventor, if any<br/><b>Egon Klein</b></p> <p>Second Inventor's signature  Date</p> <p>Residence<br/><b>Germering, GERMANY DEX</b></p> <p>Citizenship<br/><b>DE</b></p> <p>Post Office Address<br/><b>Muenchener Str. 14</b><br/><b>82110 Germering</b></p> |

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors)

|   |  |  |  |
|---|--|--|--|
| Voller Name des dritten Miterfinders<br><b>Andreas Steffan</b> 3 - ∞    |  | Full name of third joint inventor:<br><b>Andreas Steffan</b>   |  |
| Unterschrift des Erfinders<br><i>A. Steffan</i>                         |  | Inventor's signature<br><i>A. Steffan</i>                      |  |
| Datum<br>8.09.02  |  | Date   |  |
| Wohnsitz<br><b>Muenchen, DEUTSCHLAND</b>                                |  | Residence<br><b>Muenchen, GERMANY DEX</b>                      |  |
| Staatsangehörigkeit<br><b>DE</b>  |  | Citizenship<br><b>DE</b>                                       |  |
| Postanschrift<br><b>Sentilostr. 43</b>                                  |  | Post Office Address<br><b>Sentilostr. 43</b>                   |  |
| <b>81477 Muenchen</b>   |  | <b>81477 Muenchen</b>  |  |
| Voller Name des vierten Miterfinders<br><b>Rainer Windecker</b> 4 - ∞   |  | Full name of fourth joint inventor:<br><b>Rainer Windecker</b> |  |
| Unterschrift des Erfinders<br><i>Rainer Windecker</i>                   |  | Inventor's signature<br><i>Rainer Windecker</i>                |  |
| Datum<br>11.03.02   |  | Date   |  |
| Wohnsitz<br><b>Muenchen, DEUTSCHLAND</b>                                |  | Residence<br><b>Muenchen, GERMANY DEX</b>                      |  |
| Staatsangehörigkeit<br><b>DE</b>  |  | Citizenship<br><b>DE</b>                                       |  |
| Postanschrift<br><b>Gustav-Heinemann-Ring 94</b>                        |  | Post Office Address<br><b>Gustav-Heinemann-Ring 94</b>         |  |
| <b>81739 Muenchen</b>   |  | <b>81739 Muenchen</b>  |  |
| Voller Name des funften Miterfinders:<br><b>Steffi Winkler</b> 5.3.2002 |  | Full name of fifth joint inventor<br><b>Steffi Winkler</b>     |  |
| Unterschrift des Erfinders<br><i>x Steffi Winkler x</i>                 |  | Inventor's signature<br><i>x Steffi Winkler x</i>              |  |
| Datum<br>5.3.2002   |  | Date   |  |
| Wohnsitz<br><b>Gauting, DEUTSCHLAND</b>                                 |  | Residence<br><b>Gauting, GERMANY DEX</b>                       |  |
| Staatsangehörigkeit<br><b>DE</b>  |  | Citizenship<br><b>DE</b>                                       |  |
| Postanschrift<br><b>Lulu-Beck-Weg 13</b>                                |  | Post Office Address<br><b>Lulu-Beck-Weg 13</b>                 |  |
| <b>82131 Gauting</b>  |  | <b>82131 Gauting</b>   |  |
| Voller Name des sechsten Miterfinders                                   |  | Full name of sixth joint inventor                              |  |
| Unterschrift des Erfinders  |  | Inventor's signature   |  |
| Datum   |  | Date   |  |
| Wohnsitz  |  | Residence  |  |
| Staatsangehörigkeit   |  | Citizenship  |  |
| Postanschrift   |  | Post Office Address  |  |
|   |  |  |  |

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben)

(Supply similar information and signature for third and subsequent joint inventors).